

New 45° General Purpose Milling Series

MB45**NEW****Extremely versatile, high performance, high quality, and long tool life milling**

Delivers the “low cutting force” benefits of positive inserts and the “fracture resistance” benefits of negative inserts, and provides excellent surface finish

Next-generation PVD coating for milling PR18 Series

Economical milling with double-sided 8-edge inserts

Extended lineup of inserts and grades

Supports a wide variety of machining applications, including steel, stainless steel, cast iron, aluminum alloys, and heat-resistant alloys

Innovative new holder design



New 45° General Purpose Milling Series

MB45

Provides high quality and high performance machining solutions with long tool life

Delivers the “low cutting force” benefits of positive inserts and the “fracture resistance” benefits of negative inserts, and provides excellent surface finish

Extreme versatility


General-purpose milling cutters require a balance between high-quality, high-performance, long tool life, economy, and versatility to be able to tackle a wide variety of machining applications

Pursue all of these qualities without compromising with the MB45

These next-generation cutters will last, whether you are running general machining applications, or finding valuable new machining solutions



Evolving to standardize new technology

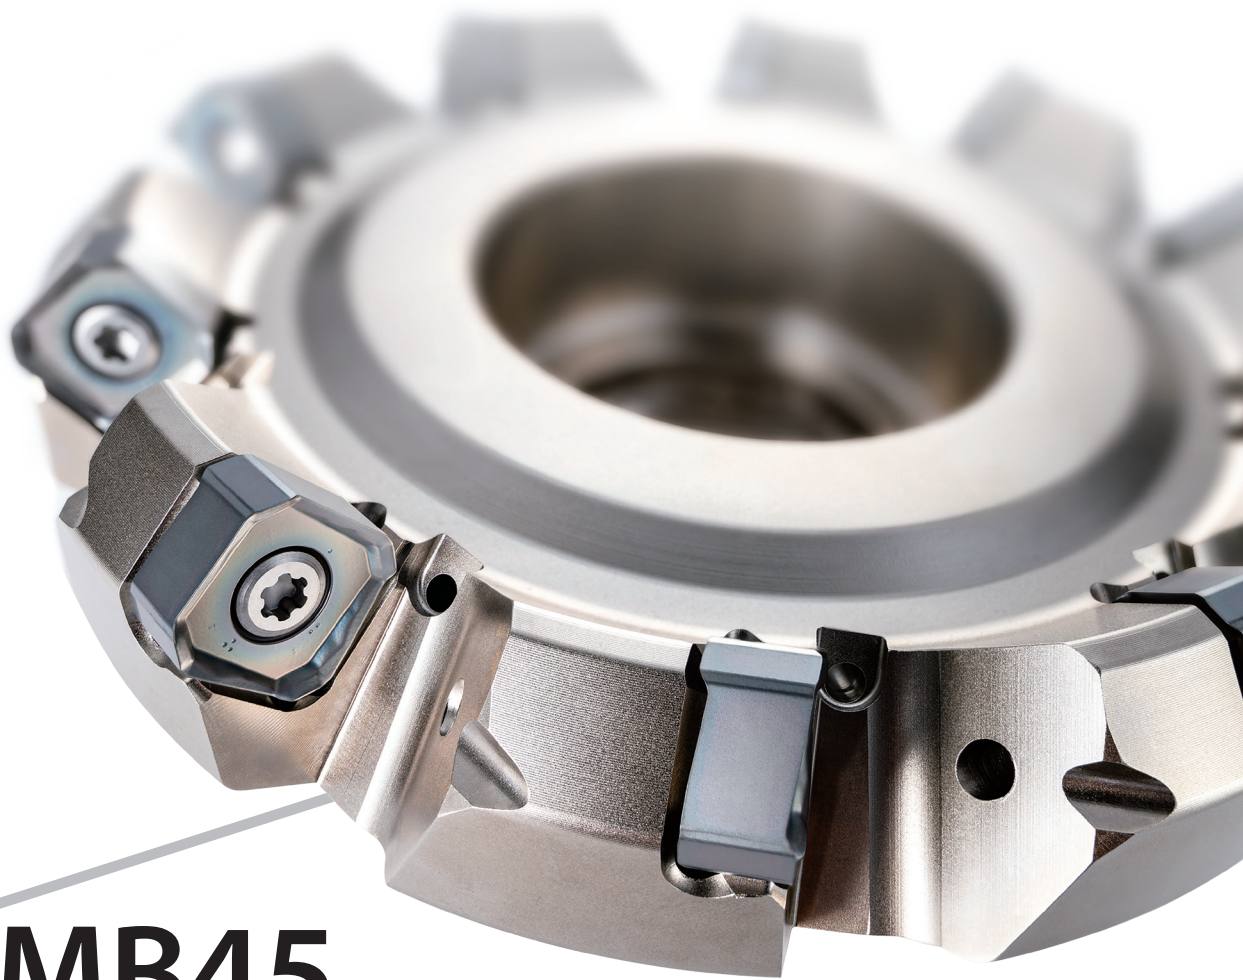

04 MB45

Delivers the “low cutting force” benefits of positive inserts and the “fracture resistance” benefits of negative inserts

High Quality

High quality results and excellent surface finish

- Lineup of E class inserts
- Long arc wiper edge
- Back coolant hole

High Performance

Unique design with high performance, low cutting force and fracture resistance

- Double edge structure and helical cutting edge (A.R. max + 13°)

Long Tool Life

Next-generation PVD coating for milling PR18 Series

NEW

- Double lamination technology maintains longer tool life
- Double-sided 8-edge design reduces tool costs

Solution

Find new value with excellent versatility

- Integrated tooling: Roughing and finishing with E class inserts
- For a wide variety of machining applications: Small machines (BT30, etc.) with $\varnothing 40\text{mm}$ cutter
- For a variety of workpieces: Cost-cutting with multiple cutting edges for aluminum machining
- Enhanced Quality: Gain excellent surface finish with Cermet inserts (TN620M)

1

"Versatility" + "Quality" Large insert lineup Supports a wide variety of machining applications

Five types of inserts for various machining applications


Economical inserts with 8 cutting edges

General purpose GM insert with E-Class and M-Class options based on required machining accuracy


Video




Low cutting force **SM** (E-Class)




Sharpness oriented with a low cutting force design
-10% cutting resistance compared to general purpose GM insert
Recommended for small machines (BT30)

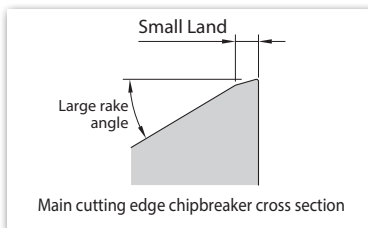


General **GM** (E-Class / M-Class)




1st recommendation for steel machining
Low cutting force and fracture resistance
E-Class or M-Class selectable

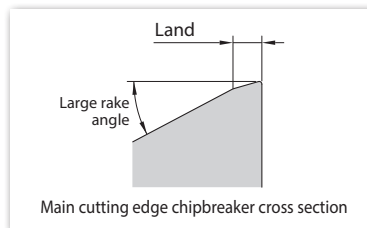

Tough Edge **GH** (M-Class)




Tough cutting edge and excellent fracture resistance
Obtuse edge design is resistant to chipping
Recommended for intermittent machining

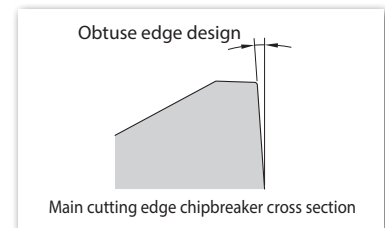

Wiper Insert **W** (E-Class)



Ultra-long wiper edge (Wiper edge length approx. 8 mm)





* Double-sided
2-edge insert

AM for Aluminum Alloys

No Land + Sharp Edge Specifications
Excellent sharpness



Applicable Insert Range

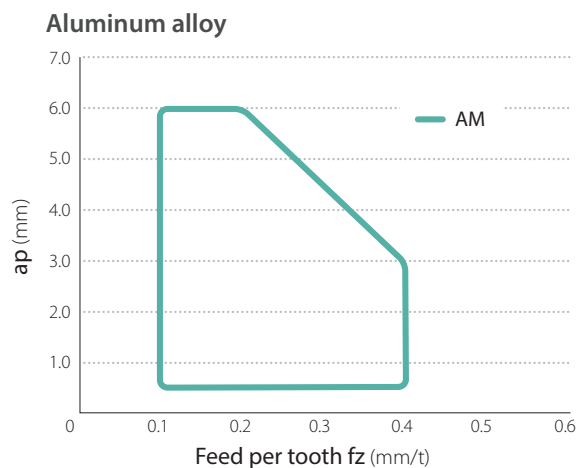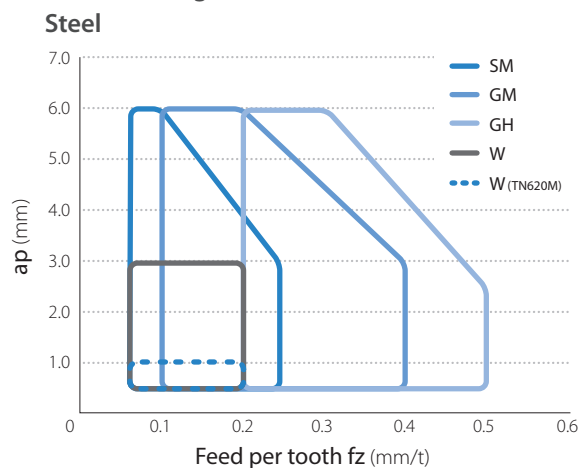

When to use GM (Class E/M)

Selection by machining application

Surface finish oriented:


GM (E-Class)

Cost-effective and surface finish oriented: GM (M-Class)

Efficiency and surface roughness oriented: W (E-Class)

Criteria	GM (E-Class)	GM (M-Class)	W (E-Class) * Wiper
Tolerance	Inscribed Circle Tolerance $\pm 0.013\text{mm}$	Inscribed Circle Tolerance $\pm 0.05\text{mm}$	Inscribed Circle Tolerance $\pm 0.013\text{mm}$
Surface finish	○ Approx. $1.6\mu\text{mRa}$	△ Approx. $3.2\mu\text{mRa}$	⊙ Approx. $0.8\mu\text{mRa}$ or less
(Gloss)	(○)	(⊙)	(⊙)
Machining efficiency	○	○	⊙
Economy	○	⊙	△

*Surface finish is based on internal assessment and varies depending on the machining environment




Solution

Tool integration for roughing and finishing with E-Class insert

MB45

Tool integration for roughing and finishing
Reduced tool management and inventory costs

Roughing $a_p = 2.5\text{ mm}$

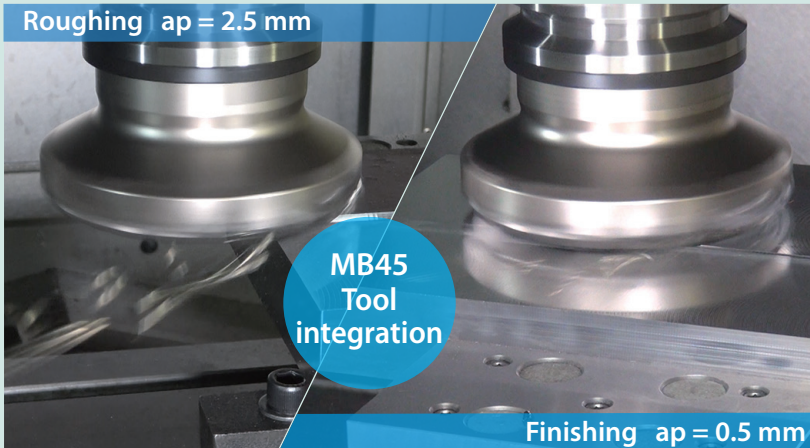

MB45
Tool
integration

Finishing $a_p = 0.5\text{ mm}$

Cutting Conditions: $\phi 125$ (10 inserts) GM (E-Class) Dry Workpiece: S50C
Roughing: $V_c = 200\text{ m/min}$, $a_p \times a_e = 2.5 \times 85\text{ mm}$, $f_z = 0.20\text{ mm/t}$
Finishing: $V_c = 250\text{ m/min}$, $a_p \times a_e = 0.5 \times 85\text{ mm}$, $f_z = 0.15\text{ mm/t}$

Video



Chip condition

Good chips in both roughing and finishing

Roughing




Finishing



Finished surface condition


Excellent surface finish

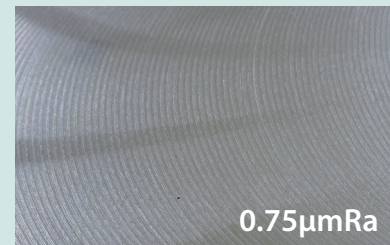

0.75μmRa

Conventional machining

Tool replacement is needed when roughing
and finishing



Roughing tool

+



Finishing tool

Image

(Internal evaluation)

2

“Versatility” + “Long tool life” Large lineup of insert grades

Steel, stainless steel, cast iron, heat-resistant alloys to aluminum alloy machining

For steel, stainless steel and cast iron

PR1825/PR1835/PR1810 New development MEGACOAT NANO EX

PR1825

P

PR1835

M

PR1810

K

For Steel (Wear resistance oriented)

For Steel (Stability oriented)

1st Recommendation for stainless steel

For Cast iron

Workpiece	P Steel					M Stainless steel					K Cast iron				
ISO	01	10	20	30	40	01	10	20	30	40	01	10	20	30	40
Grade		Wear resistance oriented					1st Recommendation					1st Recommendation			
		PR1825					PR1835					PR1810			
		Stability oriented													
		PR1835													

For hardened material

PR015S MEGACOAT HARD
PVD coating

For steel Surface finish oriented

TN620M Cermet

For stainless steel and heat-resistant alloys

CA6535 CVD coating

For aluminum machining

PDL025 DLC coating

GW25 Non-coated Carbide

Next-generation PVD coating for milling **NEW**

PR18 Series

Kyocera's Nano Layer Coating Technology
Longer Tool Life with Next-generation Coating for Milling



Double lamination technology
with special nano layer

Double Lamination Technology
Maintains Longer Tool Life

Multi-Layer structure with two unique nano layers
Superior abrasion resistance and fracture resistance

Nano-Layer

Suppresses crack growth
High toughness

AlCr-based coating

with excellent abrasion resistance

Nano-Layer

Suppresses crack growth
High toughness

AlTi-based coating


with excellent heat resistance

Multi-layering of high-performance nano layers

Increases toughness with the suppression of crack growth and optimization of internal stress


CG Image

Coating characteristics (Internal evaluation)

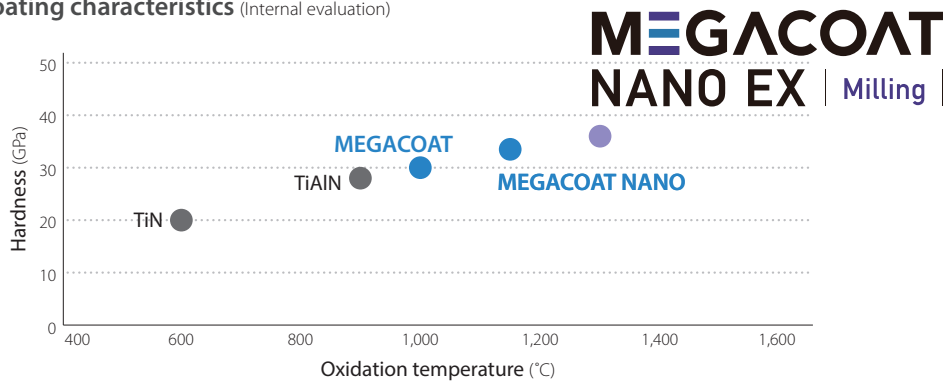


PR1825 with PVD coating MEGACOAT NANO EX provides long tool life

Wear resistance comparison (Internal evaluation)

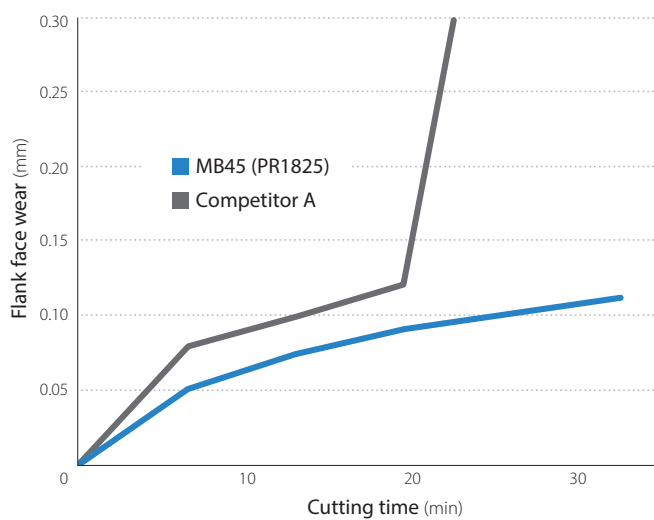


Cutting edge condition (after 20 min machining)

MB45(PR1825)

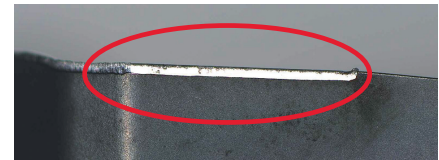


Competitor A

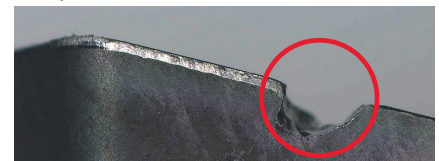

Cutting Conditions: $V_c = 120$ m/min, $a_p = 2.0$ mm, $a_e/DC = 80\%$, $f_z = 0.20$ mm/t, Dry
Workpiece: SKD11, $\phi 125$ BT50

Solution Utilizing Cermet TN620M


Cermet (TN620M) for efficient finishing

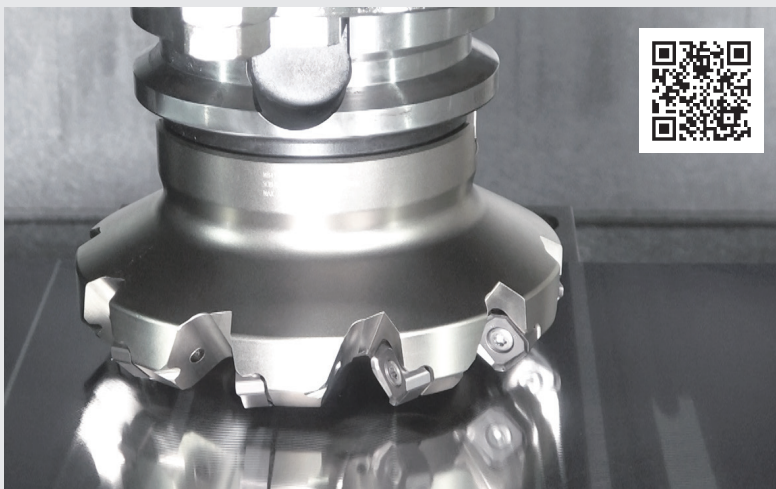


Surface finish condition (Internal evaluation)

Superior surface finish


$V_c = 200$ m/min



$V_c = 250$ m/min




$V_c = 300$ m/min



Cutting Conditions: $a_p \times a_e = 0.5 \times 100$ mm
 $f_z = 0.15$ mm/t, Dry
Workpiece: S50C, $\phi 125$ (10 inserts), GM (TN620M)

3


“Versatility” + “High Performance” New design utilizes unique technology
Low cutting force and excellent fracture resistance with excellent surface finish

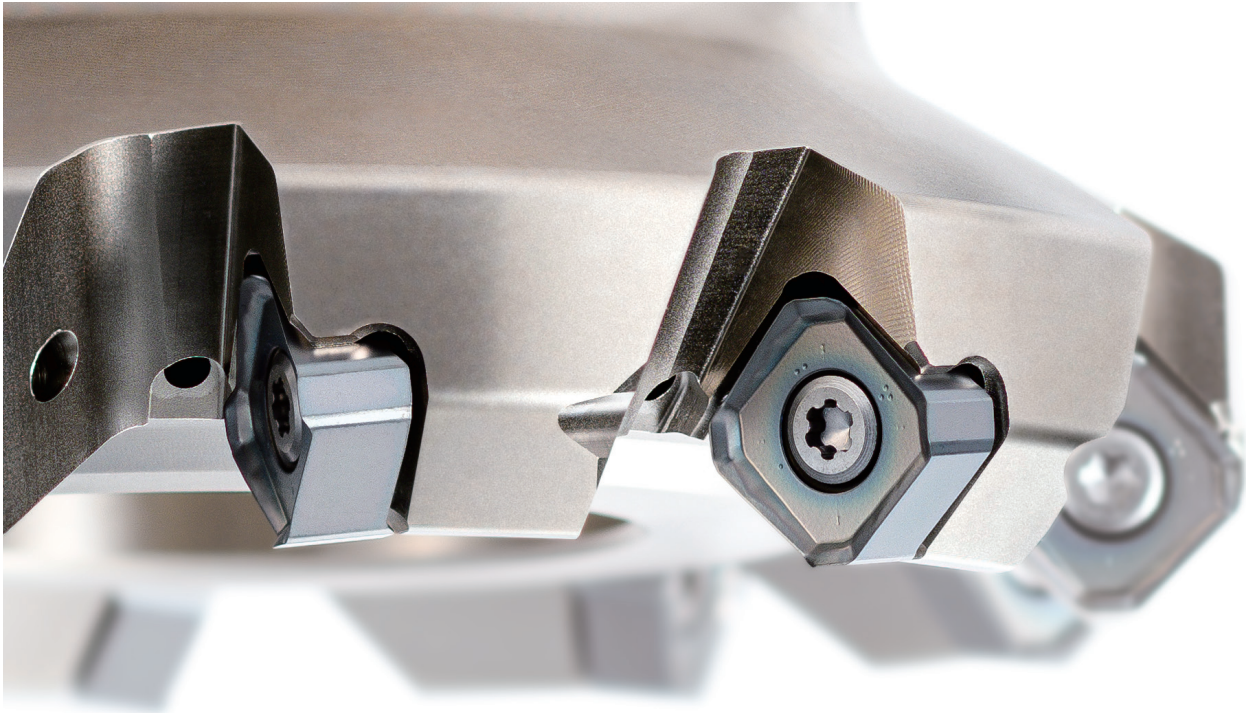

Low cutting force and excellent fracture resistance


Unique helical cutting edge and double-edge structure

A unique helical cutting edge

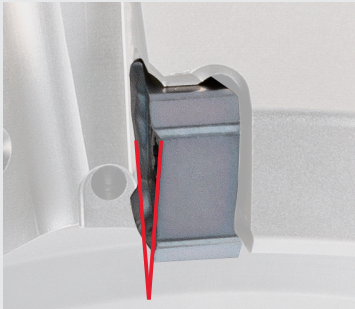


A.R. Ensures a maximum of 13° and suppresses chatter with low cutting force.

Double edge structure

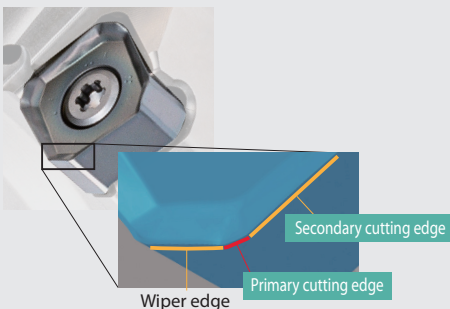


Primary cutting edge generates thin chips
Reduces impact load and greatly reduces vibration when exiting the part

Cutting resistance comparison (Internal evaluation)

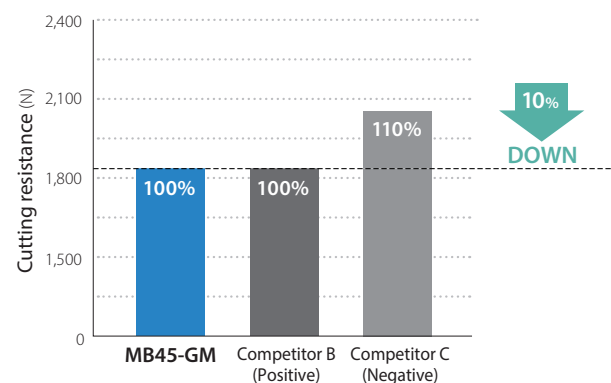

Cutting Conditions: $V_c = 180$ m/min, $a_p = 3.0$ mm, $a_e/DC = 80\%$ Center Cut, $f_z = 0.30$ mm/t, Workpiece: S50C

Fracture resistance comparison (Internal evaluation) $f_z = 0.5 \sim 0.8$ mm/t

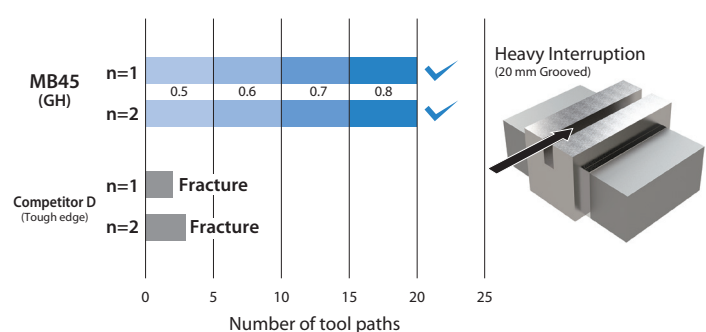


Cutting Conditions: $V_c = 100$ m/min, $a_p \times a_e = 2 \times 100$ mm Center Cut, BT50 Workpiece: SCM440HT $\phi 125$ (10 inserts)

High quality


Long arc wiper edge utilizing unique technology

Unique long arc wiper edge


Reduces variation in mounting accuracy and provides superior finished surface quality



Convex curved shape with wiper edge protruding upward
*GM/SM/AM (E-Class)




Surface roughness comparison (Internal evaluation)

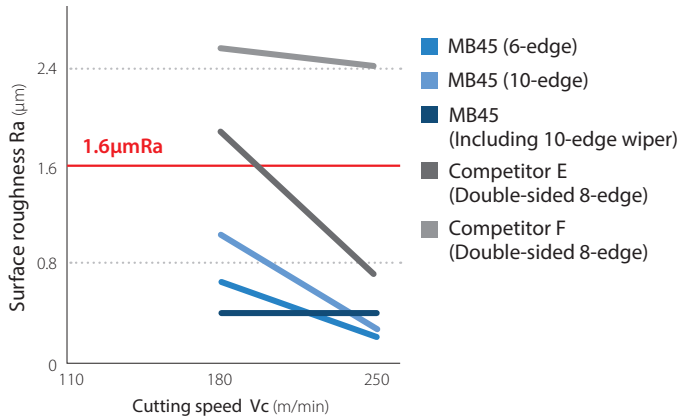


Cutting Conditions: $a_p \times a_e = 1 \times 100$ mm (Center Cut), $f_z = 0.20$ mm/t, Dry
Workpiece: S50C $\phi 125$ (6 inserts/10 inserts) GM (PR1825) BT50

Finishing surface condition (Vc = 180 m/min)


MB45 (10-edge)




MB45 (Including 10-edge wiper)



Competitor E (Double-sided 8-edge)



Competitor F (Double-sided 8-edge)



Proprietary long arc wiper edge provides excellent finishing surface quality

Finishing surface quality comparison (Image)

MB45

Long arc wiper edge

Smooth finished surface with small feed joints



General insert

Straight wiper edge

The feed joint is large and the finished surface is stepped.



Solution Unique back coolant structure delivers excellent finished surface.

Smooth chip evacuation reduces scratches and chip clogging on finished surfaces

Reliably supplies coolant to the cutting edge. Internal coolant allows for even higher quality surface finish

Unique back coolant structure

Coolant hole



Mounted closer to the cutting edge than before
Control chip outward for excellent chip evacuation to ensure to cool the cutting edge (up to $\phi 125$).

Special grooves in the discharge port





The hole position is on the far side to prevent chip contact
Improves deterioration of chip control and evacuation

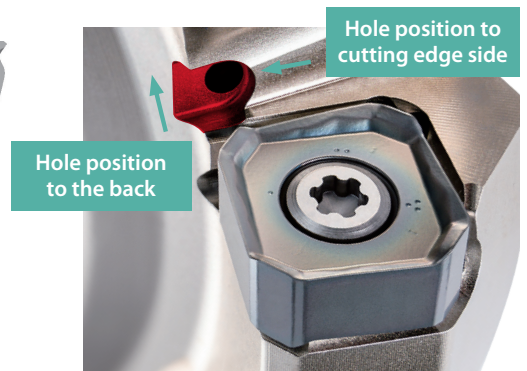
* Due to shape restrictions, some toolholders do not have grooves in the discharge port.

Fluid analysis (image)



Toolholder Lineup

Coarse pitch	Fine pitch	Extra fine pitch	Shank Type
			
Recommended for workpieces or machines with low rigidity (such as sheet machining or BT30) Economical	<u>1st recommendation</u> Good balance of stability, machining accuracy and efficiency Supports a wide range of machining areas	Recommended for high rigid workpiece and machine	Compatible with milling chucks (face mill recommended basically) *Shank size: ø32
Cutting diameter ø80 to ø315 (inch spec) Cutting diameter ø40 to ø315 (metrics) *ø315: Made to order	Cutting diameter ø80 to ø315 (inch spec) Cutting diameter ø40 to ø315 (metrics) *ø315: Made to order	Cutting diameter ø80 to ø250 (inch spec) Cutting diameter ø40 to ø250 (metrics)	Cutting diameter ø40 to ø80





Compatible with smaller machines

Lineup of coarse pitch ø40
Works well on small machines such as BT30

Recommendation for small machines:
Low cutting force SM
Cutting resistance is about 10% less than general-purpose GM

Cutting resistance comparison (Internal evaluation)

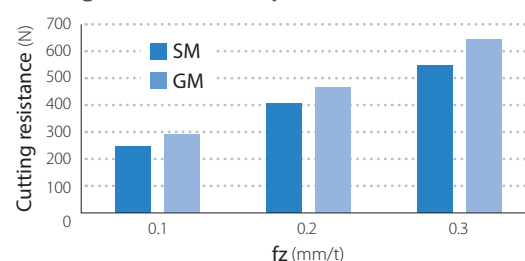


Cutting Conditions: $V_c = 150$ m/min, $a_p = 1.0$ mm, $a_e/D_c = 80\%$, Dry, BT50
Workpiece: S50C

Case studies

Excellent performance even under unstable machining conditions

Cradle SS400



$V_c = 160$ m/min
 $a_p \times a_e = 0.07 \times 130$ mm, Wet

Machining efficiency

MB45 ø160 12 inserts
GM(PR1825)

$V_f = 760$ mm/min

$f_z = 0.20$ mm/t

Competitor G ø160 8 inserts

$V_f = 640$ mm/min

$f_z = 0.25$ mm/t

Machining efficiency

1.2x


MB45 shows stable machining in an environment prone to deflection and chatter.
Increasing the number of inserts improves efficiency. Highly rated for quiet machining
Improved joints between machining passes

(User evaluation)

Case studies

Achieves 1.6x longer tool life under the same machining conditions

Housing SUS316



$V_c = 90$ m/min
 $a_p = 2.0$ mm, $f_z = 0.18$ mm/t, Dry

Number of parts

MB45 ø63 5 inserts
GM(PR1825)

30 pcs per corner

Competitor H ø63 5 inserts

18 pcs per corner

Tool life

1.6x

MB45 shows stable machining without chattering
Wear on the cutting edge proceeds normally and shows 1.6x tool life than competitor.













(User evaluation)

Recommended Cutting Conditions ★ 1st Recommendation ☆ 2nd Recommendation

Chipbreaker	Workpiece	Feed fz (mm/t) ():TN620M	Recommended Insert Grade (Vc: m/min)							
			MEGACOAT NANO EX (PVD coating)			MEGACOAT HARD (PVD coating)	CVD coating	Cermet	DLC coating	Carbide
			PR1835	PR1825	PR1810	PR015S	CA6535	TN620M	PDL025	GW25
General GM	Carbon Steel (SxxC)	0.1 – 0.2 – 0.4 (0.06 – 0.12 – 0.20)	☆ 120 – 180 – 250	★ 120 – 180 – 250	–	–	–	★ 200 – 250 – 300	–	–
	Alloy Steel (SCM, etc.)	0.1 – 0.2 – 0.4 (0.06 – 0.12 – 0.20)	☆ 100 – 160 – 220	★ 100 – 160 – 220	–	–	–	★ 180 – 220 – 250	–	–
	Mold steel (SKD, etc.)	0.1 – 0.2 – 0.35 (0.06 – 0.08 – 0.15)	☆ 80 – 140 – 180	★ 80 – 140 – 180	–	–	–	★ 150 – 180 – 220	–	–
	Austenitic stainless steel (SUS 304, etc.)	0.1 – 0.2 – 0.4	☆ 100 – 160 – 200	☆ 100 – 160 – 200	–	–	–	–	–	–
	Martensitic stainless steel (SUS 403, etc.)	0.1 – 0.2 – 0.4	☆ 150 – 200 – 250	–	–	–	☆ 180 – 240 – 300	–	–	–
	Precipitation hardening stainless steel (SUS 630, etc.)	0.1 – 0.2 – 0.3	★ 90 – 120 – 150	–	–	–	–	–	–	–
	Gray cast iron (FC)	0.1 – 0.2 – 0.4	–	–	★ 120 – 180 – 250	–	–	–	–	–
	Ductile cast iron (FCD)	0.1 – 0.2 – 0.35	–	–	★ 100 – 150 – 200	–	–	–	–	–
	Ni-based heat resistant alloys	0.1 – 0.12 – 0.2	☆ 20 – 30 – 50	–	–	–	★ 20 – 30 – 50	–	–	–
Low Cutting Force SM	Carbon Steel (SxxC)	0.06 – 0.12 – 0.25	☆ 120 – 180 – 250	☆ 120 – 180 – 250	–	–	–	–	–	–
	Alloy Steel (SCM, etc.)	0.06 – 0.12 – 0.25	☆ 100 – 160 – 220	☆ 100 – 160 – 220	–	–	–	–	–	–
	Mold steel (SKD, etc.)	0.06 – 0.1 – 0.2	☆ 80 – 140 – 180	☆ 80 – 140 – 180	–	–	–	–	–	–
	Austenitic stainless steel (SUS 304, etc.)	0.06 – 0.12 – 0.25	★ 100 – 160 – 200	☆ 100 – 160 – 200	–	–	–	–	–	–
	Martensitic stainless steel (SUS 403, etc.)	0.06 – 0.12 – 0.25	☆ 150 – 200 – 250	–	–	–	★ 180 – 240 – 300	–	–	–
	Precipitation hardening stainless steel (SUS 630, etc.)	0.06 – 0.12 – 0.25	☆ 90 – 120 – 150	–	–	–	–	–	–	–
	Gray cast iron (FC)	0.06 – 0.12 – 0.25	–	–	☆ 120 – 180 – 250	–	–	–	–	–
	Ductile cast iron (FCD)	0.06 – 0.1 – 0.2	–	–	☆ 100 – 150 – 200	–	–	–	–	–
	Ni-based heat resistant alloys	0.06 – 0.1 – 0.15	☆ 20 – 30 – 50	–	–	–	☆ 20 – 30 – 50	–	–	–
	Titanium alloy (Ti-6Al-4V)	0.06 – 0.08 – 0.15	★ 40 – 60 – 80	–	–	–	–	–	–	–
Tough Edge GH	Carbon Steel (SxxC)	0.2 – 0.3 – 0.5	☆ 120 – 180 – 250	☆ 120 – 180 – 250	–	–	–	–	–	–
	Alloy Steel (SCM, etc.)	0.2 – 0.3 – 0.5	☆ 100 – 160 – 220	☆ 120 – 160 – 220	–	–	–	–	–	–
	Mold steel (SKD, etc.)	0.2 – 0.3 – 0.45	☆ 80 – 140 – 180	☆ 80 – 140 – 180	–	–	–	–	–	–
	Austenitic stainless steel (SUS 304, etc.)	0.2 – 0.3 – 0.4	☆ 100 – 160 – 200	☆ 100 – 160 – 200	–	–	–	–	–	–
	Martensitic stainless steel (SUS 403, etc.)	0.2 – 0.3 – 0.4	☆ 150 – 200 – 250	–	–	–	☆ 180 – 240 – 300	–	–	–
	Precipitation hardening stainless steel (SUS 630, etc.)	0.2 – 0.3 – 0.4	☆ 90 – 120 – 150	–	–	–	–	–	–	–
	Gray cast iron (FC)	0.2 – 0.3 – 0.5	–	–	☆ 120 – 180 – 250	–	–	–	–	–
	Ductile cast iron (FCD)	0.2 – 0.3 – 0.45	–	–	☆ 100 – 150 – 200	–	–	–	–	–
	Ni-based heat resistant alloys	0.1 – 0.2 – 0.3	☆ 20 – 30 – 50	–	–	–	☆ 20 – 30 – 50	–	–	–
	Hardened material (40 HRC or less)	0.05 – 0.1 – 0.2	–	–	–	★ 50 – 80 – 100	–	–	–	–
AM	Aluminum alloy	0.1 – 0.2 – 0.4	–	–	–	–	–	–	★ 200 – 600 – 900	☆ 200 – 500 – 800

The number in bold font is recommended starting conditions. Adjust the cutting speed and the feed rate within the above conditions according to the actual machining situation.
Machining with coolant is recommended for Ni-based heat resistant alloy and titanium alloy. When choosing wet machining for other workpieces, reduce the cutting speed to 70% or less.
When machining aluminum, be sure to use within recommended conditions. Do not rotate more than the maximum speed listed on the main unit.
Dry machining is recommended for cermet.


Applicable Inserts

Usage Classification	P	Steel	★	☆					■							
		Mold steel	★	☆					■							
★: Roughing/ 1st recommendation ☆: Roughing/ 2nd recommendation ■: Finishing/ 1st recommendation □: Finishing/ 2nd recommendation (Hardened material is 40 HRC or less)	M	Austenitic stainless steel	☆	★												
		Martensitic stainless steel		☆				★								
		Precipitation hardening stainless steel		★												
	K	Gray cast iron					★									
		Ductile cast iron					★									
	N	Nonferrous metal									★	☆				
	S	Heat resistant alloys (Ni-based heat resistant alloys)							★							
		Titanium alloy		★												
H	Hardened material							★								
Shape		Description	Dimensions (mm)						MEGACOAT NANO EX <div>NEW</div>			MEGACOAT HARD	CVD coating	Cermet	DLC coating	Carbide
			IC	S	BCH	BS	D1	INSL	PR1825	PR1835	PR1810	PR0155	CA6535	TN620M	PDL025	GW25
 General Purpose (M-Class)		SNMU1406ANER-GM	14.7	6.07	0.8	2.3	5.8		●	●	●		●	●		
 Tough Edge (M-Class)		SNMU1406ANER-GH	14.7	5.89	1.4	1.7	5.8		●	●	●	●	●			
 General Purpose (E-Class)		SNEU1406ANER-GM	14.7	6.07	0.8	2.3	5.8		●	●	●		●	●		
 Low cutting force (E-Class)		SNEU1406ANER-SM	14.7	6.07	0.8	2.3	5.8		●	●			●			
 Aluminum and non-ferrous metals (E-Class)		SNEU1406ANFR-AM	14.7	6.07	0.8	2.3	5.8								●	●
 Wiper Insert (E-Class 2-edge)		SNEU1406ANEN-W	14.7	6.15	1.1	8.8	5.8	19.4	●	●	●		●	●		


●: Standard Stock

Applicable Chipbreaker Range


Carbide coating

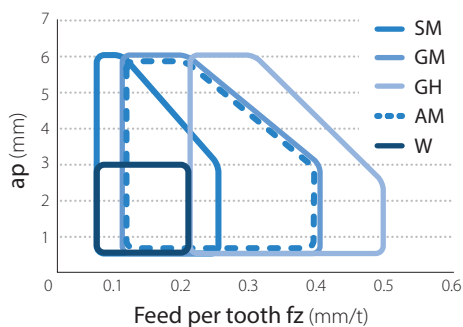

Cermet

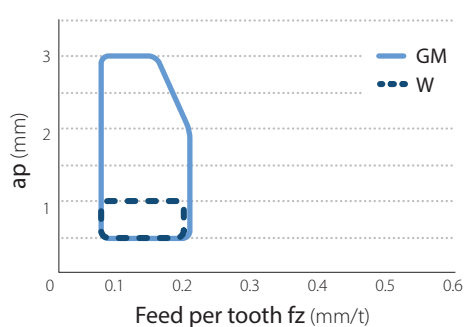

MB45 Face mill

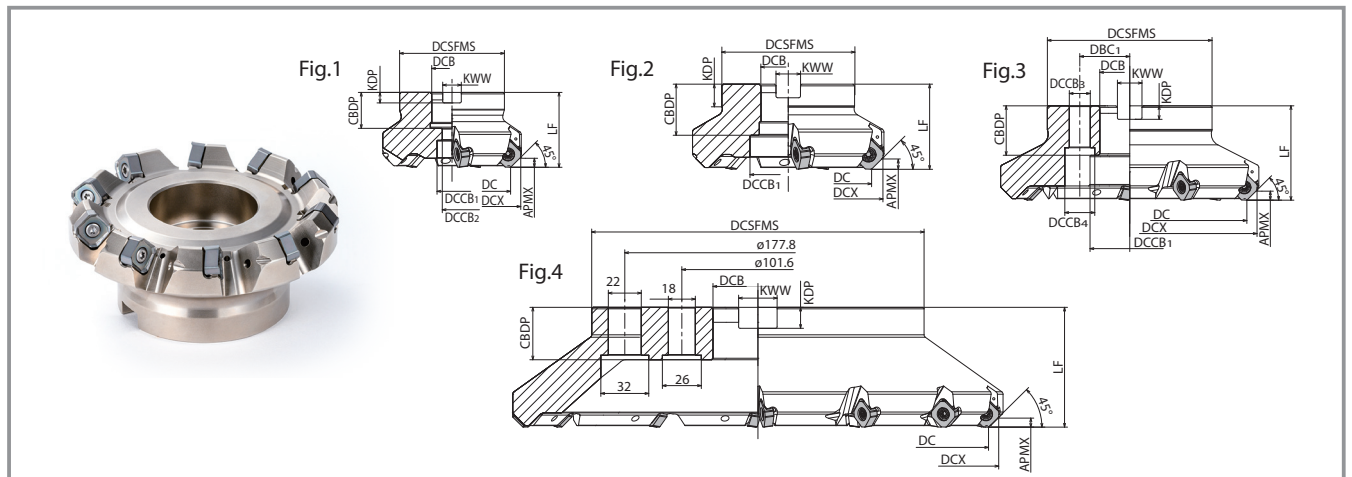

Toolholder dimensions

Description			Stock	Number of inserts	Dimensions (mm)											A.R. max.(°)	R.R.(°)	Coolant hole	Weight (kg)	Maximum number of revolutions (min-1)	Shape					
					DC	DCX	DCSFMS	DCB	DCCB1	DCCB2	DCCB3	DCCB4	DBC1	LF	CBDP							KDP	KWW	APMX		
Bore Dia. Inch spec.	Coarse Pitch	MB45 - 080R-14T5C	●	5	80	94	70	25.4	20	13		-	-	-	50	27	6	9.5	6	13	-12	Yes	1.4	9,000	Fig.1	
		100R-14T5C	●	5	100	114	78	31.75	45	34					8	12.7	2.0	8,000					Fig.2			
		125R-14T6C	●	6	125	139	89	38.1	55						10	15.9	3.3	7,200								
		160R-14T7	●	7	160	174	110	50.8	70	-	18	26	101.6	63	38	14	25.4	6	13	-12	No	5.1	6,300	Fig.3		
		200R-14T8	●	8	200	214	140	47.625	110																	7.6
		250R-14T10	●	10	250	264																			10.8	5,100
		315R-14T14	MTO	14	315	329	222		-			-	-	-	80							20.4	4,500	Fig.4		
	Fine Pitch	MB45 - 080R-14T6C	●	6	80	94	70	25.4	20	13		-	-	-	50	27	6	9.5	6	13	-12	Yes	1.4	9,000	Fig.1	
		100R-14T8C	●	8	100	114	78	31.75	45	34					8	12.7	1.8	8,000					Fig.2			
		125R-14T10C	●	10	125	139	89	38.1	55						10	15.9	3.1	7,200								
		160R-14T12	●	12	160	174	110	50.8	70	-	18	26	101.6	63	38	14	25.4	6	13	-12	No	4.9	6,300	Fig.3		
		200R-14T14	●	14	200	214	140	47.625	110																	7.4
		250R-14T16	●	16	250	264																			10.5	5,100
		315R-14T18	MTO	18	315	329	222		-			-	-	-	80							20.2	4,500	Fig.4		
	Extra Fine Pitch	MB45 - 080R-14T8C	●	8	80	94	70	25.4	20	13		-	-	-	50	27	6	9.5	6	13	-12	Yes	1.3	9,000	Fig.1	
		100R-14T10C	●	10	100	114	78	31.75	45	34					8	12.7	1.8	8,000					Fig.2			
		125R-14T13C	●	13	125	139	89	38.1	55						10	15.9	3.0	7,200								
		160R-14T16	●	16	160	174	110	50.8	70	-	18	26	101.6	63	38	14	25.4	6	13	-13	No	4.8	6,300	Fig.3		
		200R-14T18	●	18	200	214	140	47.625	110																	7.2
		250R-14T20	●	20	250	264																			10.4	5,100

Maximum number of revolutions

Set the number of revolutions per minute within the recommended cutting speed specified by the workpiece on page 10.


Do not use the face mill or shank type at the maximum revolution or higher since the centrifugal force may cause inserts and parts to scatter even under no load.

●: Standard Stock MTO: Made to order

Parts

Description		Parts				
		Clamp screw	Wrench	Anti-seize compound	Arbor clamp bolt	
Face mill	MB45- 040R/050R-14T...-M	SB-50110TRP	TTP-20	P-37	HH8X25	-
	040R/050R-14T...-22M				-	W10X31
	063R-14T...				HH10X30	-
	080R-14T...				HH12X35	-
	100R-14T...				-	-
	315R-14T...					
Insert clamp tightening torque 4.5 N·m						
Shank Type	MB45- 40S32-14T2C	SB-50110TRP	TTP-20	P-37	-	-
	80S32-14T5C					
Insert clamp tightening torque 4.5 N·m						

Coat anti-seize compound thinly on portion of taper and thread prior to installation.

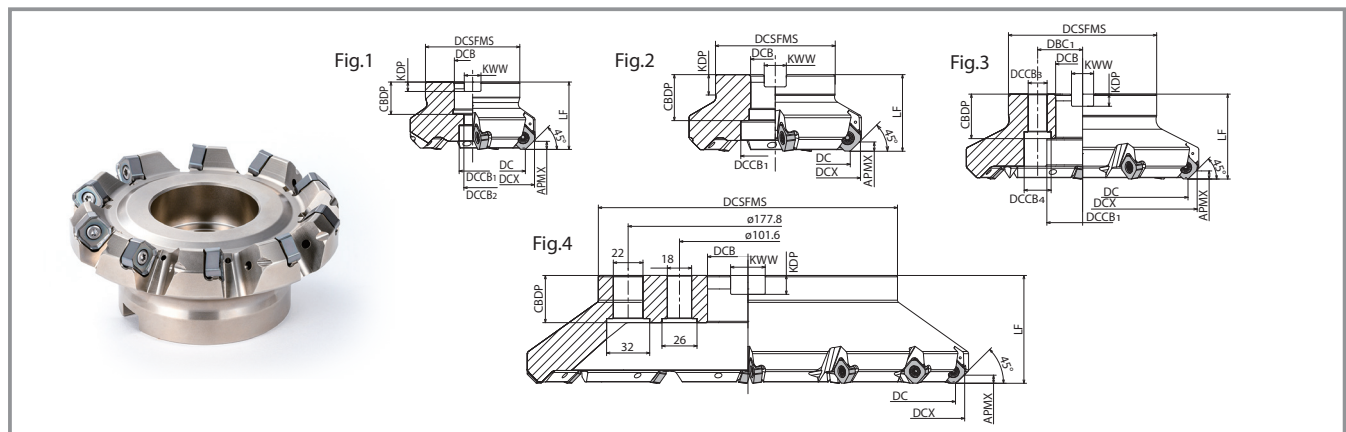

Toolholder dimensions

Description			Stock	Number of inserts	Dimensions (mm)												A.R. max.(°)	R.R.(°)	Coolant hole	Weight (kg)	Maximum number of revolutions (min ⁻¹)	Shape								
					DC	DCX	DCSFMS	DCB	DCCB1	DCCB2	DCCB3	DCCB4	DBC1	LF	CBDP	KDP							KWW	APMX						
Metric	Coarse Pitch	MB45 -	040R-14T2C-M	●	2	40	54	38	16	13.5	9				40	19	5.6	8.4	6	13	-12	Yes	0.4	12,700	Fig.1					
			050R-14T3C-M	●	3	50	64	48	22	18	11					21	6.3	10.4					0.5	11,400						
			063R-14T4C-M	●	4	63	77	50								0.7	10,100													
			080R-14T5C-M	●	5	80	94	70	27	20	13	50	24	7	12.4	1.4	9,000	Fig.2												
			100R-14T5C-M	●	5	100	114	78	32	45	30		8	14.4	1.9	8,000														
			125R-14T6C-M	●	6	125	139	89	40	55					33	9	16.4						3.2	7,200						
			160R-14T7-M	●	7	160	174	110			-	14	20	66.7				63				35	14	25.7	5.1	6,300	Fig.3			
			200R-14T8-M	●	8	200	214	142	60	110		18	26	101.6	7.3	5,700														
			250R-14T10-M	●	10	250	264	-				-	-	-	80	10.5	5,100								Fig.4					
	315R-14T14-M	MTO	14	315	329	222	-	-	-	-	-	19.4	4,500																	
	Fine Pitch	MB45 -	040R-14T3C-M	●	3	40	54	38	16	13.5	9				40	19	5.6	8.4	6	13	-12	Yes	0.3	12,700	Fig.1					
			040R-14T3C-22M	●				47	12	-	50				21	6.3	10.4	0.5					11,400							
			050R-14T4C-M	●	4	50	64	48	22	18	11				40	24	7	12.4					0.4	10,100		Fig.2				
			063R-14T5C-M	●	5	63	77	50	27	20	13	50	30	8	14.4	1.4	9,000													
			080R-14T6C-M	●	6	80	94	70								20	13	33					9	16.4	1.8		8,000			
			100R-14T8C-M	●	8	100	114	78	32	45	63					35	14								25.7	3.0	7,200			
			125R-14T10C-M	●	10	125	139	89	40	55		-	14	20	66.7							4.9				6,300	Fig.3			
			160R-14T12-M	●	12	160	174	110					18	26	101.6			7.0				5,700								
			200R-14T14-M	●	14	200	214	142	60	110	-		18	26	101.6	10.2	5,100	Fig.4												
			250R-14T16-M	●	16	250	264	-	-	-		-				80	19.2					4,500								
			Extra Fine Pitch	MB45 -	040R-14T4C-M	●	4	40	54	38	16	13.5	9				40	19				5.6	8.4	6	13	-12	Yes	0.3	12,700	Fig.1
					040R-14T4C-22M	●				47	12	-	50				21	6.3				10.4	0.4					11,400		
	050R-14T5C-M	●			5	50	64	48	22	18	11	40	24				7	12.4	0.6	10,100	Fig.2									
	063R-14T6C-M	●			6	63	77	50	27	20	13	50	30	8	14.4	1.3	9,000													
	080R-14T8C-M	●			8	80	94	70								20	13	33	9	16.4		1.7	8,000							
	100R-14T10C-M	●			10	100	114	78	32	45	-					14	20				66.7	2.9	7,200					Fig.3		
	125R-14T13C-M	●			13	125	139	89	40	55		18	26	101.6	35							14	25.7			4.8	6,300			
	160R-14T16-M	●			16	160	174	110										60	110	6.9						5,700				
	200R-14T18-M	●			18	200	214	142	60	110	-					18	26	101.6	35	14	25.7					10.1	5,100			
	250R-14T20-M	●			20	250	264	-	-	-		-	-	-	-							-	-			-	-	-		

Maximum number of revolutions


Set the number of revolutions per minute within the recommended cutting speed specified by the workpiece on page 10.

Do not use the face mill or shank type at the maximum revolution or higher since the centrifugal force may cause inserts and parts to scatter even under no load.


● Standard Stock MTO: Made to order

How to Install Double Screw

1. Insert the fine pitch side of the double screw into the toolholder and carefully rotate it until the screw stops.




2. To ensure that the holder and arbor are securely connected, provide a clearance of approx. 4 mm between the holder and arbor before tightening the screws.



3. Rotate the screw until there is no clearance, and check the holder is attached to the arbor.



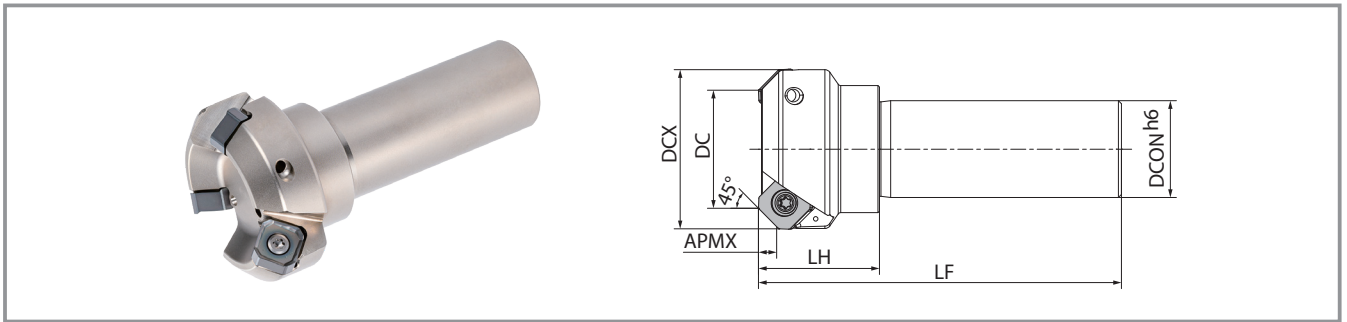

Toolholder dimensions

		Stock	Number of inserts	Dimensions (mm)					A.R. max.(°)	R.R.(°)	Coolant hole	Weight (kg)	Maximum number of revolutions (min ⁻¹)	
				DC	DCX	DCON	LH	LF						APMX
MB45-	40S32-14T2C	●	2	40	54	32	40	120	6	13	-12	Yes	0.9	12,700
	50S32-14T3C	●	3	50	64								1.0	11,400
	63S32-14T4C	●	4	63	77								1.1	10,100
	80S32-14T5C	●	5	80	94								1.5	9,000

Maximum number of revolutions


Set the number of revolutions per minute within the recommended cutting speed specified by the workpiece on page 10.

Do not use the face mill or shank type at the maximum revolution or higher since the centrifugal force may cause inserts and parts to scatter even under no load.

●: Standard Stock

Precautions

Applications



Facing

How to mount inserts

1. Completely eliminate chips and dust from the insert mounting side.
2. Coat anti-seize compound thinly on portion of taper and thread of clamp screw prior to installation.
3. After mounting a clamp screw on the top edge of wrench, tighten the screw while keeping the insert pushed against the shim seat surface and holder surface (Fig.1).
4. Tighten the wrench in a direction parallel to the clamp screw.
Recommended tightening torque ... 4.5 N·m
5. After tightening, check that there is no gap between the contact surface of the insert and the surface of the shim, or between the side surface of insert and the holder surface.

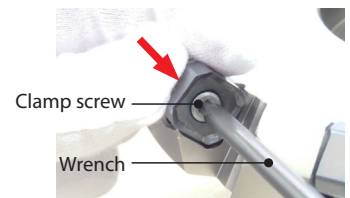


Fig.1

Defining the Machining Diameter (DC)

With respect to the machining diameter (DC) specified in ISO*, the numerical value of the machining diameter (Fig. 2) where the plane surface is finished depends on the insert. Please be careful.




Fig.2

Machining diameter at which the plane surface is finished (for ø125mm)


	GM	GH	SM	AM
Difference to machining diameter (DC)	-1.1	-2.0	-1.1	-1.1
Machining diameter (mm) at which the plane surface is finished	123.9	123.0	123.9	123.9
*Dimensional tolerance	0 -0.2			

*GH has a larger double-edge size, so the machining diameter at which the plane surface is finished is smaller than other inserts.

Precautions when machining


Precautions when machining aluminum

- Be sure to use within recommended conditions.
- Do not rotate more than the maximum speed listed on the main unit.
*The number of revolutions listed on the holder is the maximum number of revolutions without load.



Precautions for wet machining of steel

For wet machining, select PR1835 and use a cutting speed of 70% or less of the recommended condition as a guide.



MB45-125R-14T10C

SCREW:SB-50110TRP WRENCH:

MAX 7,200 RPM

Rotating at maximum speed is prohibited.



Precautions

How to use a wiper insert

1. Use when the feed amount per revolution [mm/rev] becomes large. The table below shows the standard feed amount per revolution and the number of wipers installed.

Feed per rotation	Number of wiper inserts	Pocket for wiper insert
$2.0 < f \text{ [mm/rev]} \leq 4.0$	1 pc	Pocket with "Single dot" (Fig. 3)
$4.0 < f \text{ [mm/rev]}$	2 pcs	"Single dot" and "Double dots" pockets (Figs. 3, 4) * Only holders with 12 or more inserts have "Double dots"

Fig. 3



Fig. 4



"Double dots" are placed in the diagonal pocket of "Single dot"
* For only holders with 12 or more inserts

2. Chipbreaker recommended for use with wiper insert

	GM chipbreaker	GH chipbreaker	SM chipbreaker	AM chipbreaker
Wiper Insert	✓	Not recommended	✓	Not recommended

3. Install the wiper insert correctly as shown in Fig. 5.

* Fig. 6 shows the insert incorrectly attached to the holder.

Fig. 5



Fig. 6





Milling Solution

Achieving Unprecedented Tool Life



