

THE NEW VALUE FRONTIER



High Efficiency End Mills and  
Face Mills

**MEC Series**

High Efficiency End Mills and Face Mills

# MEC Series




Low Cutting Force, Reduced Chattering, and High Efficiency Machining

Large Lineup for Various Applications


New PDL025 Grade for Machining Aluminum

Fine Pitch End Mills & Face Mills Lineup Expansion



**NEW**

DLC Coating  
(PDL025)



**NEW**

Fine Pitch End Mills &  
Face Mills




# MEC


Excellent Surface Finish with Low Cutting Forces. New Grades and Cutters for Various Applications  
 PDL025 DLC Coated Carbides for Aluminum Machining

## 1 Low Cutting Force and Sharp Cutting Performance

Low Cutting Forces with Helical Cutting Edge Design

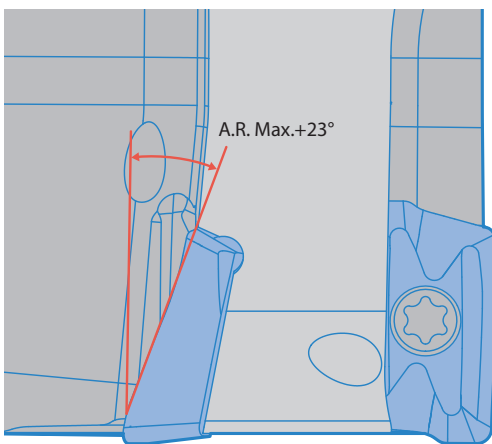

Cutting Force Comparison (In-house Evaluation)

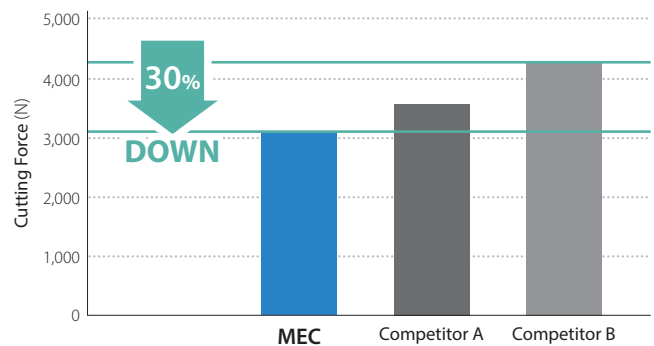


Cutting Conditions :  $V_c = 100$  m/min,  $f_z = 0.2$  mm/t,  $a_p \times a_e = 9 \times 10$  mm, Dry, Cutter Dia.  $D_c = \varnothing 20$   
 Workpiece : S50C

## 2 Smooth surface of shoulder wall

Smoother shoulder wall finish with multiple passes

Shoulder Wall Surface Comparison (In-house Evaluation)

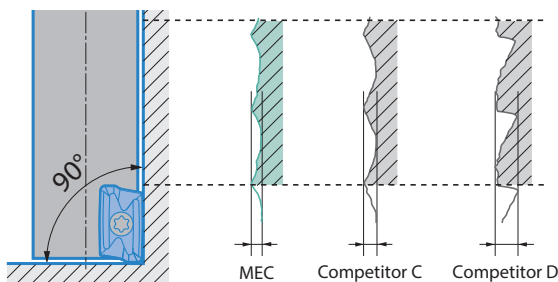

Cutting Conditions :  $V_c = 120$  m/min,  $f_z = 0.1$  mm/t,  $a_p \times a_e = 5 \times 10$  mm, Dry, Cutter Dia.  $D_c = \varnothing 20$   
 Workpiece : S50C

## 3 Large Tooling Lineup

Introducing Fine Pitch End Mills & Face Mills  
 High Efficiency Shouldering




# MEGACOAT NANO PR1535

Stable machining is realized by a combination of tough substrate with limited chipping and special coating featuring high heat resistance. Features high performance in cutting general steel, mold steel and materials that are difficult to cut

## 1 Toughening by a New Cobalt Mixing Ratio (In-house Evaluation)

High Toughness Carbide Base Material

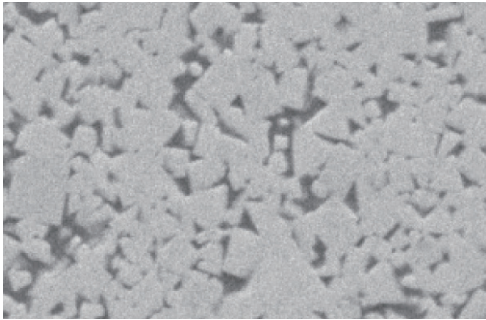


UP  
23%  
Fracture Toughness

## 2 Stability Improvement

The coarse grain structure and uniform particle size correspond to improved heat resistance, with conductivity values decreased by 11%. The uniform structure also reduces crack propagation.

UP  
Shock Resistance


Cracking Comparison by Diamond Indentor (In-house Evaluation)

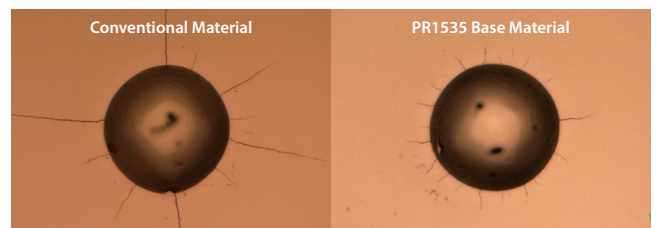

Long Cracks

Short Cracks


Coating Properties (Abrasion Resistance)

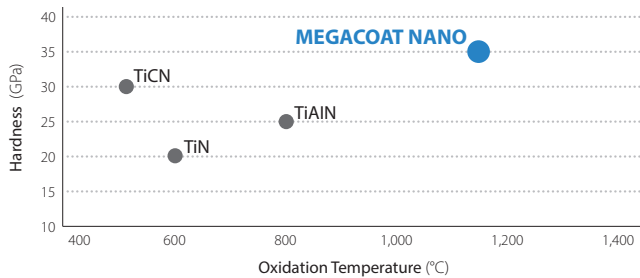

Low Oxidation Resistance High

Achieve long tool life with the combination of a tough substrate and a special Nano coating layer

Coating Properties (Deposition Resistance)

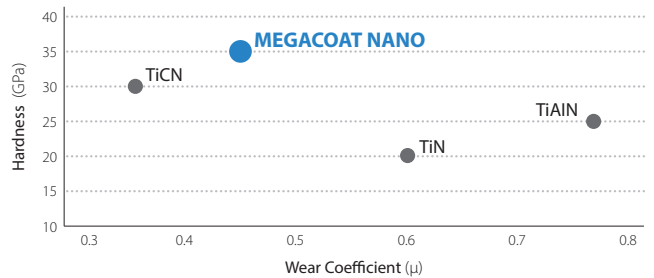


High Deposition Resistance Low

Stable Machining with Excellent Wear Resistance


# NEW DLC Coating PDL025

High Quality and Long Tool Life for Machining Aluminum  
High Hardness with Kyocera's Proprietary Hydrogen-free DLC Coating

Coating Properties

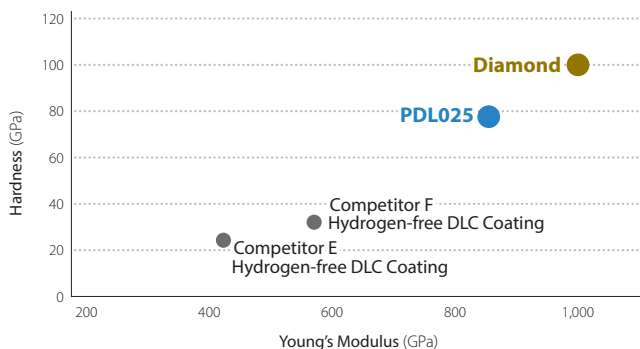

Welding Resistance Comparison (In-house Evaluation)

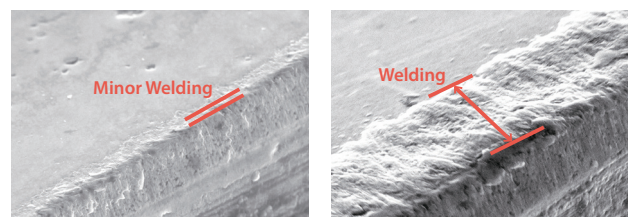

PDL025

Competitor G

Cutting Conditions : Vc = 800 m/min, fz = 0.1 mm/t, ap x ae = 3 x 5 mm, Dry  
Cutter Dia. Dc = ø25 mm Workpiece : A5052 Cutting Length : 57 mm

High Efficiency End Mill


# MECH

Notched Inserts Reduce Chattering, Break Chips into Small Pieces, and Improved Chip Evacuation  
High Efficiency Heavy Machining with Large ap


1

## Low Cutting Force due to Notched Inserts are Good for Heavy Machining


Notched Inserts Reduce Cutting Force  
Lower Cutting Force and Reduced Chattering

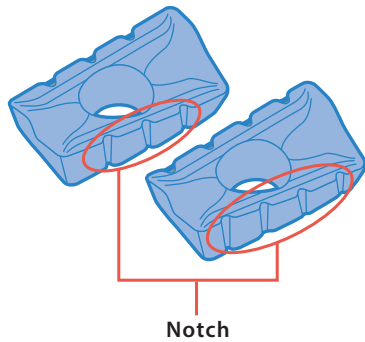

Application Range Comparison (In-house Evaluation)

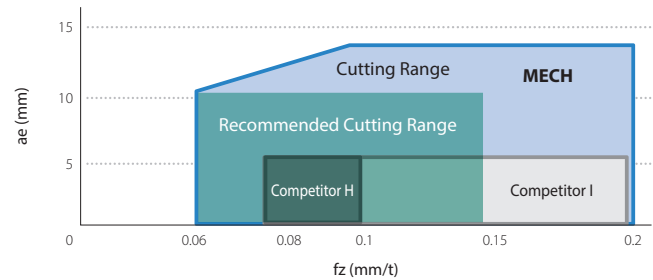


Cutting Force Comparison (In-house Evaluation)

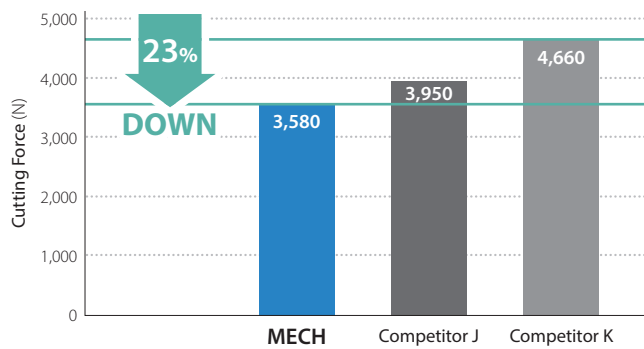

Cutting Conditions : Vc = 120 m/min, fz = 0.1 mm/t, ap x ae = 40 x 10 mm, Dry  
MECH032-S32-11-5-4T Workpiece : S50C

Surface Wall Comparison (In-house Evaluation)

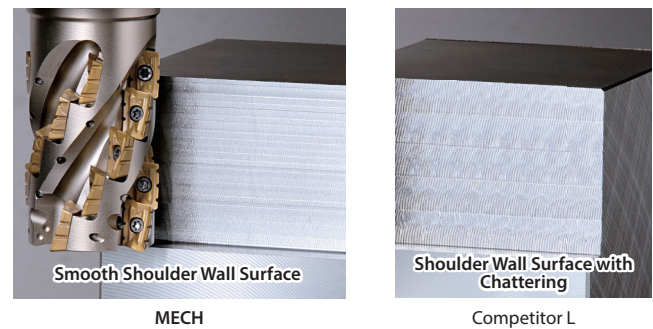


Cutting Conditions : Vc = 120 m/min, fz = 0.12 mm/t, ap x ae = 40 x 7 mm, Dry  
MECH032-S32-11-5-4T Workpiece : S50C



## 2 Improved Chip Evacuation

Notched Insert Breaks Chips into Small Pieces  
Flat-Cut Flute Provides Excellent Chip Evacuation

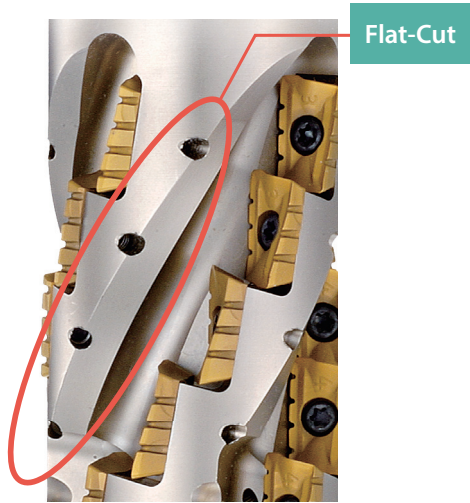

Chips Comparison (In-house Evaluation)



MECH





Competitor M













Cutting Conditions :  $V_c = 120$  m/min,  $f_z = 0.12$  mm/t,  $a_p \times a_e = 40 \times 10$  mm, Dry  
MECH032-S32-11-5-4T Workpiece : SS400

## 3 MECH Interchangeable Head Minimizes Tooling Costs

If head is damaged, it can be replaced  
Minimizing tooling costs

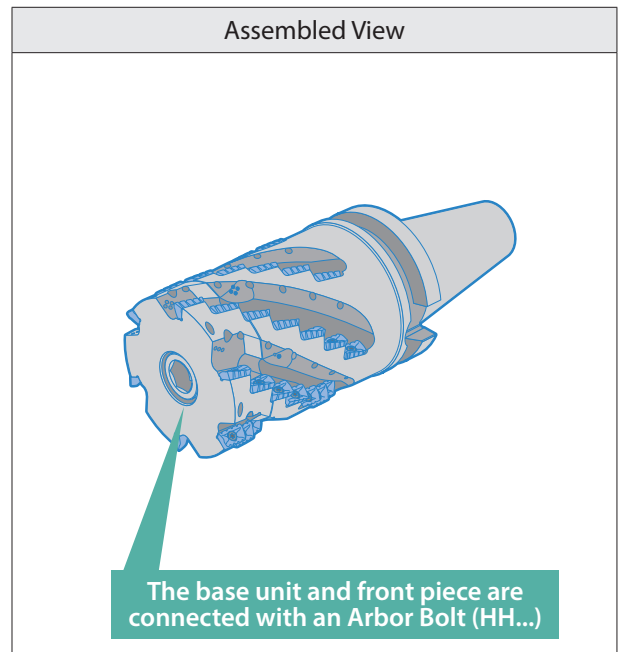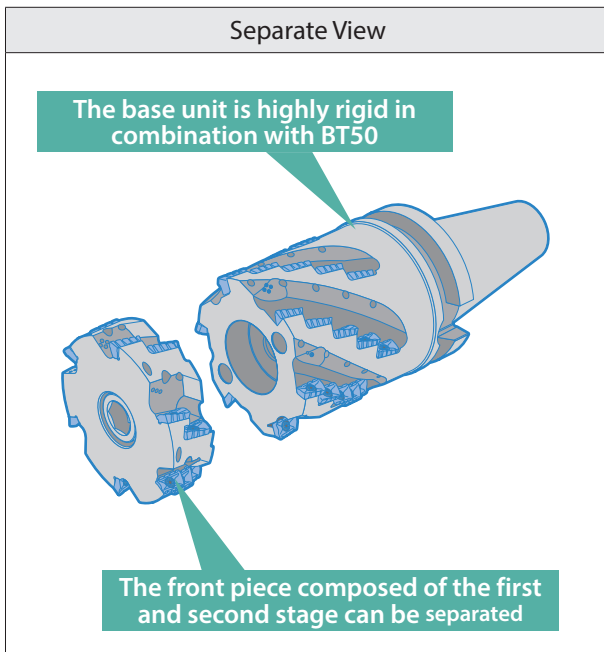



# Applicable Inserts

Usage Classification		P	Carbon Steel / Alloy Steel		■		★	★		☆								Ref. Page for Applicable Toolholders		
			Mold Steel		■		★	★		☆										
★ : Roughing / 1st Choice ☆ : Roughing / 2nd Choice ■ : Finishing / 1st Choice □ : Finishing / 2nd Choice (In case hardness is under 45HRC)		M	Austenitic Stainless Steel				★	☆		☆										
			Martensitic Stainless Steel				★	☆												
			Precipitation Hardened Stainless Steel						★											
			Gray Cast Iron											★						
			Nodular Cast Iron											★						
		N	Non Ferrous Metals																	
			Heat Resistant Alloy (Ni-base)				★	☆	★	★										
			Titanium Alloy						★				★							
			Hard Materials								□			□						
Insert	Description	Dimension (mm)					Angle			Cermet	CVD Coated Carbide	MEGACOAT NANO	MEGACOAT			PVD Coated Carbide				
		A	T	ød	W (X)	r <sub>E</sub> (Z)	α	β	γ	TN100M	CA6535	PR1535	PR1225	PR1230	PR1210	PR830				
Handed Insert shows Right-hand																				
		BDMT	110302ER-JT	6.3	3.0	2.8	11.0	0.2	18°	15°	—		●	●	●		●	●	P7 P8	
			110304ER-JT					0.4					●	●	●		●	●		
			110308ER-JT					0.8					●	●	●		●	●		
			BDMT	11T302ER-JT	6.7	3.8	2.8	11.0	0.2	18°	13°	—		●	●	●		●	●	P7 P8 P9 P10
			11T304ER-JT	0.4					●				●	●		●	●			
			11T308ER-JT	0.8					●				●	●		●	●			
			11T312ER-JT	1.2									●	●	●		●	●		
			11T316ER-JT	1.6									●	●	●		●	●		
			11T320ER-JT	2.0									●	●	●		●	●		
			11T324ER-JT	2.4									●	●	●		●	●		
			11T331ER-JT	3.1									●	●	●		●	●		
			BDMT	170404ER-JT	9.6	4.9	4.4	17.0	0.4	18°	13°	—		●	●	●		●	●	P7 P8 P9 P10
			170408ER-JT	0.8					●				●	●		●	●			
			170412ER-JT	1.2									●	●	●		●	●		
	170416ER-JT	1.6		●					●				●		●	●				
	170420ER-JT	2.0		●					●				●		●	●				
	170424ER-JT	2.4		●					●				●		●	●				
	170431ER-JT	3.1		●					●				●		●	●				
	170440ER-JT	4.0		●	●	●		●	●											
		BDMT	110302ER-JS	6.3	3.0	2.8	11.0	0.2	18°	15°	—		●	●	●		●	●	P7 P8	
			110304ER-JS					0.4					●	●	●		●	●		
			110308ER-JS					0.8					●	●	●		●	●		
			BDMT	11T302ER-JS	6.7	3.8	2.8	11.0	0.2	18°	13°	—		●	●	●		●	●	P7 P8 P9
			11T304ER-JS	0.4									●	●	●		●	●		
			11T308ER-JS	0.8									●	●	●		●	●		
	BDMT	170404ER-JS	9.6	4.9	4.4	17.0	0.4	18°	13°	—		●	●	●		●	●	P10		
	170408ER-JS	0.8									●	●	●		●	●				
		BDMT	11T308ER-N2	6.7	3.8	2.8	11.0	0.8	18°	13°	—			●	●	●	●	●		
		BDMT	11T308ER-N3	6.7	3.8	2.8	11.0	0.8	18°	13°	—			●	●	●	●	●	P19 P20	
		BDMT	170408ER-N3	9.6	4.9	4.4	17.0	0.8	18°	13°	—			●	●	●	●	●	P21 P22	
		BDMT	170408ER-N4	9.6	4.9	4.4	17.0	0.8	18°	13°	—			●	●	●	●	●		

Inserts are sold in 10 piece boxes  
● : Stock Std.


## Applicable Inserts

Usage Classification		P		M		K		N		S		H		Ref. Page for Toolholder			
★ : Roughing / 1st Choice ☆ : Roughing / 2nd Choice ■ : Finishing / 1st Choice □ : Finishing / 2nd Choice (In case hardness is under 45HRC)		Carbon Steel / Alloy Steel		Austenitic Stainless Steel		Gray Cast Iron		Non Ferrous Metals		Heat Resistant Alloy (Ni-base)		Hard Materials					
		Mold Steel		Martensitic Stainless Steel		Nodular Cast Iron				Titanium Alloy							
		Precipitation Hardened Stainless Steel															
Insert	Description	Dimension (mm)					Angle				DLC Coated Carbide	Carbide	PCD				
		A	T	ød	W (X)	r <sub>e</sub> (Z)	S	α	β	γ	PDI025	GW25	KPD001	KPD230			
Handed Insert shows Right-hand																	
	BDGT 11T302FR-JA	6.7	3.8	2.8	11.0	—	18°	13°	—	●	●			P7 P8 P9 P10			
	11T304FR-JA									●	●						
	11T308FR-JA									●	●						
	BDGT 170404FR-JA	9.6	4.9	4.4	17.0	—	18°	13°	—	●	●						
	170408FR-JA									●	●						
	170420FR-JA									●	●						
170431FR-JA	●									●							
	BDMT 11T302FR	6.7	3.8	2.8	11.0	3.6	18°	13°	—			●	●				
	11T304FR											●	●				
	BDMT 170402FR	9.6	4.9	4.4	17.0	4.4	18°	13°	—			●	●				
										170404FR			●	●			

Inserts are sold in 10 piece boxes  
 PCD Inserts are sold in 1 piece boxes  
 ● : Stock Std.

## Toolholder and Applicable Insert

Toolholder	Applicable Insert					Remarks
MEC.....11	BDMT 1103○○ER-JT	BDMT 1103○○ER-JS	—	—	—	
MEC.....11T MEC-R-11	BDMT 11T3○○ER-JT	BDMT 11T3○○ER-JS	BDGT 11T3○○FR-JA	BDMT 11T3○○FR	—	Using notched insert (---N2/N3/N4) is not recommended.
MEC.....17 MEC-R-17	BDMT 1704○○ER-JT	BDMT 1704○○ER-JS	BDGT 1704○○FR-JA	BDMT 1704○○FR	—	
MECH...11	BDMT 11T3○○ER-JT	BDMT 11T3○○ER-JS	BDGT 11T3○○ER-JA	—	BDMT11T308ER-N2 BDMT11T308ER-N3	Notched insert (---N2/N3/N4) is 1st recommendation.
MECH...17	BDMT 1704○○ER-JT	BDMT 1704○○ER-JS	BDGT 1704○○FR-JA	—	BDMT170408ER-N3 BDMT170408ER-N4	

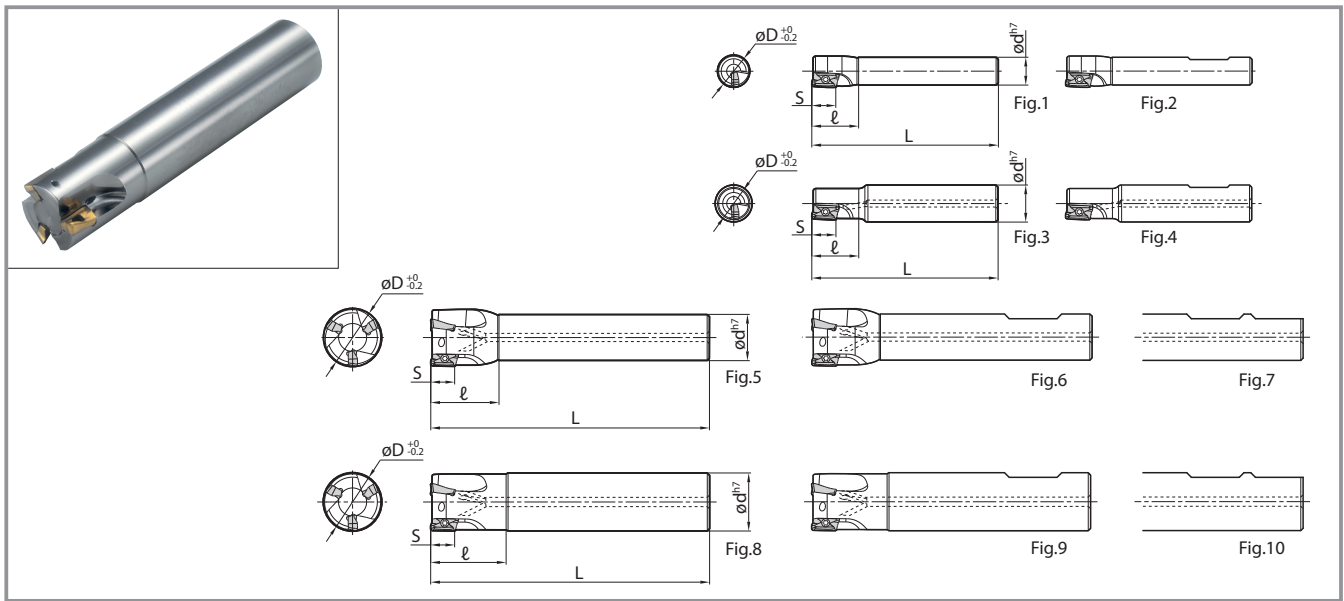

Toolholder Dimensions

Description	Stock	No. of Inserts	Dimension (mm)					Rake Angle		Coolant Hole	Drawing	Spare Parts		Max. Revolution (min <sup>-1</sup> )					
			$\phi D$	$\phi d$	L	$\ell$	S	A.R. (MAX.)	R.R.			Clamp Screw	Wrench						
Cylindrical	Standard Shank	MEC	10-S10-11	●	10	10	17	10	+10°	-24°	No	Fig.1	SB-2545TR	DTM-8	54,800				
				●												16			
			12-S10-11	●	12	12	20	10	+12°	-21°	No	Fig.1			50,800				
				●												16			
			12-S12-11	●	12	12	20	10	+12°	-19°	No	Fig.1			49,200				
				●												16			
			13-S12-11	●	13	12	20	10	+12°	-19°	No	Fig.1			47,700				
		●		16															
		14-S12-11	●	14	12	20	10	+12°	-19°	No	Fig.1	47,700							
			●												16				
		Same Shank Size	MEC	16-S12-11T	●	16	12	100	23	10	+18°	-14°			No	Fig.1	SB-2555TRG	DTM-8	43,750
					●														
			17-S16-11T	●	17	16	110	26	10	+20°	-10°	Yes			Fig.5	37,500			
				●															18
	18-S16-11T		●	18	16	110	26	10	+20°	-10°	Yes	Fig.5	37,500						
			●											19					
	19-S16-11T		●	19	16	110	26	10	+20°	-10°	Yes	Fig.5	37,500						
			●											20					
	20-S16-11T		●	20	16	110	26	10	+20°	-10°	Yes	Fig.5	37,500						
			●											21					
	21-S20-11T		●	21	20	130	32	10	+21°	-10°	Yes	Fig.5	37,500						
			●											22					
	22-S20-11T		●	22	20	130	32	10	+21°	-10°	Yes	Fig.5	37,500						
			●											24					
	24-S20-11T	●	24	20	130	32	10	+21°	-10°	Yes	Fig.5	37,500							
		●											25						
	25-S20-11T	●	25	20	130	32	10	+21°	-10°	Yes	Fig.5	37,500							
		●											25						
25-S20-11T-4	●	4	28	25	130	32	+22°	-9°	Yes	Fig.8	37,500								
	●											30							
28-S25-11T	●	3	30	25	130	32	+22°	-9°	Yes	Fig.8	37,500								
	●											32							
30-S25-11T	●	4	32	25	130	32	+23°	-9°	Yes	Fig.8	37,500								
	●											32							
32-S25-11T	●	4	32	25	130	32	+23°	-9°	Yes	Fig.8	37,500								
	●											32							
32-S25-11T-5	●	5	40	32	150	50	+23°	-8°	Yes	Fig.8	37,500								
	●											50							
40-S32-11T	●	5	40	32	150	50	+23°	-8°	Yes	Fig.8	37,500								
	●											50							
50-S32-11T	●	5	50	32	150	50	+23°	-7°	Yes	Fig.8	37,500								
	●											50							
Long Shank	MEC	20-S16-11T	●	16	16	100	30	10	+18°	-14°	Yes	Fig.8	SB-2555TRG	DTM-8	43,750				
			●													20	20	110	
	20-S20-11T	●	20	20	110	30	10	+20°	-10°	Yes	Fig.8	41,000							
		●													25	25	120		
	25-S25-11T	●	3	25	25	120	32	10	+21°	-10°	Yes	Fig.8			37,500				
		●														25	25	120	
	25-S25-11T-4	●	4	32	32	130	40	10	+23°	-9°	Yes	Fig.8			33,900				
		●														32	32	130	
	32-S32-11T	●	5	32	32	130	40	10	+23°	-9°	Yes	Fig.8			33,900				
		●														32	32	130	
	Long Shank	MEC	20-S18-170-11T	●	18	170	30	10	+20°	-10°	Yes	Fig.5			SB-2555TRG	DTM-8	41,000		
				●														20	140
		20-S20-140-11T	●	20	140	60	10	+20°	-10°	Yes	Fig.8	39,600							
			●														22	170	30
22-S20-170-11T		●	22	170	30	10	+21°	-10°	Yes	Fig.5	37,500								
		●										23	210	32					
25-S23-210-11T		●	25	23	210	32	10	+21°	-10°	Yes	Fig.8	37,500							
		●											25	160			60		
25-S25-160-11T		●	25	25	160	60	10	+22°	-9°	Yes	Fig.5	35,800							
		●											28	210			32		
25-S25-210-11T		●	28	25	210	32	10	+22°	-9°	Yes	Fig.5	35,800							
		●											30	250			40		
32-S30-250-11T		●	32	30	250	40	10	+23°	-9°	Yes	Fig.8	33,900							
		●											32	200			65		
32-S32-200-11T	●	32	32	200	65	10	+23°	-9°	Yes	Fig.8	33,900								
	●											35	250	40					
32-S32-250-11T	●	35	32	250	40	10	+23°	-9°	Yes	Fig.8	32,600								
	●											35	250	40					
35-S32-250-11T	●	40	35	250	40	10	+23°	-9°	Yes	Fig.5	30,000								
	●											40	240	65					

Coat Anti-seize Compound (P-37) thinly on portion of taper and thread when insert is fixed.

● : Stock Std.

Caution with Max. Revolution

When running an endmill or a cutter at the maximum revolution, the insert or cutter may be damaged by centrifugal force. For more details, see "Warning" on page P13.







Toolholder Dimensions

Description	Stock	No. of Inserts	Dimension (mm)					Rake Angle		Coolant Hole	Drawing	Spare Parts		Max. Revolution (min <sup>-1</sup> )												
			øD	ød	L	ℓ	S	A.R. (MAX.)	R.R.			Clamp Screw	Wrench													
															Clamp Screw		Wrench									
Cylindrical	Long Shank	MEC 20-S20-150-11T-3	●	3	20	20	150	60	10	+20°	-10°	Yes	Fig.8	SB-2555TRG	DTM-8	41,000										
		25-S25-170-11T-3	●	4	25	25	170	60	+21°	-10°	37,500															
		25-S25-170-11T-4	●	4	25	25	170	60	+21°	-10°	34,800															
		30-S25-180-11T-3	●	3	30	30	180	32	10	+23°	-9°					33,900										
		32-S32-200-11T-3	●	4	32	32	200	65	15.7	+16°	-11°					35,000										
		32-S32-200-11T-4	●	4	32	32	200	65	15.7	+17°	-7°					30,000										
	32-S32-200-11T-5	●	5	32	32	200	65	15.7	+19°	-7°	25,000															
	Standard Shank	MEC 25-S20-17	●	2	25	20	120	36	15.7	+16°	-11°	Yes	Fig.5	SB-4070TRN	DTM-15	35,000										
		32-S25-17	●	3	32	25	130	40	15.7	+17°	-7°					30,000										
		40-S32-17	●	4	40	32	150	50	15.7	+19°	-7°					25,000										
		50-S32-17	●	4	50	32	150	50	15.7	+19°	-7°					17,000										
		MEC 25-S25-17	●	2	25	25	120	36	15.7	+16°	-11°					Yes	Fig.8	SB-4070TRN	DTM-15	35,000						
		32-S32-17	●	3	32	32	130	40	15.7	+17°	-7°									30,000						
	Long Shank	MEC	25-S25-160-17	●	2	25	25	160	60	15.7	+16°	-11°	Yes	Fig.8	SB-4070TRN	DTM-15	35,000									
			25-S25-210-17	●		28	210	36	32,500																	
			28-S25-210-17	●		28	210	36	30,000																	
			32-S32-200-17	●		32	200	65	27,700																	
			32-S32-250-17	●		32	250	40	25,000																	
35-S32-250-17			●	35		250	40	30,000																		
40-S32-240-17		●	40	240	65	25,000																				
MEC		32-S32-250-17-3	●	3	32	32	250	65	15.7	+17°	-7°	Yes	Fig.5	SB-4070TRN	DTM-15	30,000										
		40-S32-250-17-3	●	4	40	32	250	65	15.7	+19°	-7°					25,000										
		40-S32-250-17-4	●	4	40	32	250	65	15.7	+19°	-6°					17,000										
	50-S42-250-17-4	●	4	50	42	250	64	15.7	+19°	-6°	17,000															
Weldon	Standard Shank	MEC	1	10-W10-1103	MTO	10	10	60	17	10	+10°	-24°	No	Fig.2	SB-2545TR	DTM-8	54,800									
				10-W16-1103-H	MTO	10	16	68	17								50,800									
				12-W10-1103	MTO	12	10	60	20								+12°	-21°	No	Fig.2	47,700					
				12-W16-1103-H	MTO	12	16	68	20								+12°	-19°	No	Fig.2	47,700					
				14-W12-1103	MTO	14	12	68	20								+12°	-19°	Yes	Fig.4	47,700					
				14-W16-1103-H	MTO	14	16	68	20								+12°	-19°	Yes	Fig.4	47,700					
		MEC	2	16-W12-11T3	MTO	16	12	68	23	10	+18°	-14°	No	Fig.2	SB-2555TRG	DTM-8	43,750									
				18-W16-11T3-H	MTO	18	16	68	25								+19°	-13°	43,000							
				20-W16-11T3-H	MTO	20	16	68	25								+20°	-13°	41,000							
				22-W20-11T3-H	MTO	3	22	20	81								26	+21°	-10°	39,600						
				25-W20-11T3-H	MTO	3	25	20	81								26	+21°	-10°	37,500						
				28-W25-11T3-H	MTO	3	28	25	88								29	+22°	-10°	35,800						
	MEC	4	30-W25-11T3-H	MTO	30	25	88	32	10	+23°	-9°	Yes	Fig.7	SB-2555TRG	DTM-8	34,800										
			32-W25-11T3-H	MTO	32	25	88	32								33,900										
			40-W32-11T3-H	MTO	5	40	32	110								50	+23°	-8°	30,000							
			16-W16-11T3-H	MTO	2	16	16	68								25	10	+18°	-14°	Yes	Fig.9	SB-2555TRG	DTM-8	43,750		
			20-W20-11T3-H	MTO	3	20	20	81								30								+20°	-10°	41,000
			25-W25-11T3-H	MTO	3	25	25	88								32								+21°	-10°	37,500
	32-W32-11T3-H	MTO	4	32	32	100	40	+23°	-9°	33,900																
	Standard Shank	MEC	2	25-W20-1704-H	MTO	25	20	86	36	15.7	+16°	-11°	Yes	Fig.6	SB-4070TRN	DTM-15	35,000									
				32-W25-1704-H	MTO	3	32	25	92								50	+17°	-7°	30,000						
				40-W32-1704-H	MTO	4	40	32	110								50	+19°	-7°	25,000						
		MEC	2	25-W25-1704-H	MTO	2	25	25	92	36	15.7	+16°	-11°	Yes	Fig.10	SB-4070TRN	DTM-15	35,000								
				32-W32-1704-H	MTO	3	32	32	100	40								+17°	-7°	30,000						


Coat Anti-seize Compound (P-37) thinly on portion of taper and thread when insert is fixed.

● : Stock Std.  
MTO : Made to order

Applicable Inserts

Description	Applicable Inserts →P5,P6			Applicable Inserts →P6
				
MEC----11 MEC----1103	BDMT 1103○○ER-JT	BDMT 1103○○ER-JS	—	—
MEC----11T MEC----11T03	BDMT 11T3○○ER-JT	BDMT 11T3○○ER-JS	BDGT 11T3○○FR-JA	BDMT 11T3○○FR
MEC----17 MEC----1704	BDMT 1704○○ER-JT	BDMT 1704○○ER-JS	BDGT 1704○○FR-JA	BDMT 1704○○FR

Recommended Cutting Conditions →P13

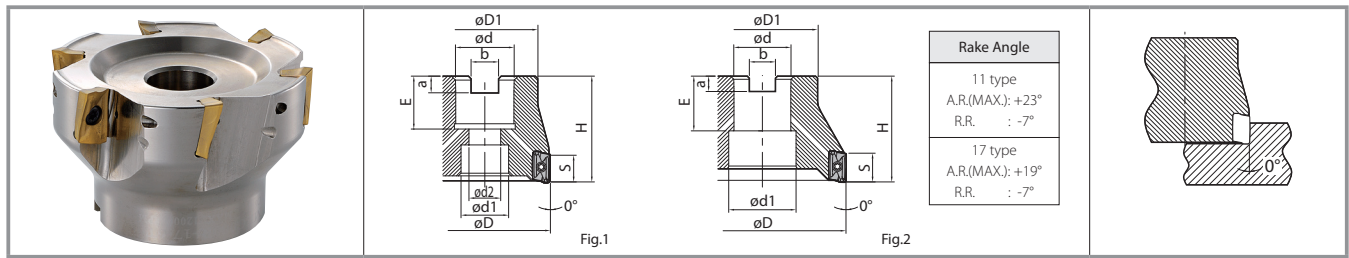

Toolholder Dimensions

Description	Stock	No. of Inserts	Dimension (mm)										Coolant Hole	Drawing	Weight (Kg)	Spare Parts		Max. Revolution (min <sup>-1</sup> )		
			$\phi D$	$\phi d$	$\phi d1$	$\phi d2$	H	E	a	b	S	Clamp Screw				Wrench				
Metric	Coarse pitch	MEC 040R-11-5T-M	●	5	40	16	14	8.5		20	5.6	8.5	10	Yes	Fig.1	0.3	SB-2555TRG	DTM-8	30,000	
		MEC 050R-11-5T-M	●	5	50	22	18	12	40	22	6.3	10.4								0.4
		MEC 063R-11-6T-M	●	6	63															0.6
		MEC 080R-11-7T-M	●	7	80	27	20	14	50	26	7	12.4								0.9
		MEC 100R-11-9T-MN	●	9	100	32	26	17.6	55		8	14.4								1.6
		MEC 125R-11-11T-M	●	11	125	40	45	32	63	33	9.5	16.4								3.1
	MEC 160R-11-14T-M	●	14	160	40	68	-					4.5		No	Fig.2	4.5			13,900	
	MEC 032R-11-5T-M	●	5	32	16	11.5	8.5	35	20	5.6	8.4	0.1								
	MEC 040R-11-6T-M	●	6	40				40				0.2								
	MEC 080R-11-10T-M	●	10	80	27	20	14	50	26.5	7	12.4	0.9								
	MEC 100R-11-11T-M	●	11	100	32	26	17.6	55	34	8	14.4	1.7								
	MEC 100R-11-11T-M	●	11	100	32	26	17.6	55	34	8	14.4	1.7								
Bore Dia. Inch spec	Coarse pitch	MEC 040R-17-4T-M	●	4	40	16	14	8.5		20	5.6	8.5	15.7	Yes	Fig.1	0.3	SB-4070TRN	DTM-15	25,000	
		MEC 050R-17-4T-M	●	5	50				40											0.4
		MEC 063R-17-5T-M	●	6	63	22	18	12	50	22	6.3	10.4								0.6
		MEC 080R-17-6T-M	●	7	80	27	20	14	50	26	7	12.4								1.0
		MEC 100R-17-7T-MN	●	9	100	32	26	17.6	55		8	14.4								1.8
		MEC 125R-17-9T-M	●	9	125	40	45	32	63	33	9.5	16.4								3.1
	MEC 160R-17-12T-M	●	12	160	40	68	-					4.5		No	Fig.2	4.5			7,400	
	MEC 063R-11-6T	●	6	63	25.4	20	14	50	26	6	9.5	0.8								
	MEC 080R-11-7T	●	7	80				50				1.0								
	MEC 100R-11-9TN	●	9	100	31.75	26	17.6	63	32	8	12.7	1.8								
	MEC 125R-11-11T	●	11	125	38.1	45	32	63	38	10	15.9	3.4								
	MEC 160R-11-14T	●	14	160	50.8	70	-		47		19.1	4.4								
Bore Dia. Inch spec	Fine pitch	MEC 063R-11-8T	●	8	63	25.4	20	14	50	26	6	9.5	10	Yes	Fig.1	0.8	SB-2555TRG	DTM-8	20,500	
		MEC 080R-11-10T	●	10	80				50											1.0
		MEC 063R-17-5T	●	5	63	25.4	20	14	50	26	6	9.5								0.8
		MEC 080R-17-6T	●	6	80				50											1.0
		MEC 100R-17-7TN	●	7	100	31.75	26	17.6	63	32	8	12.7								1.8
		MEC 125R-17-9T	●	9	125	38.1	45	32	63	38	10	15.9								3.4
	Coarse pitch	MEC 160R-17-12T	●	12	160	50.8	70	-		47		19.1		4.5	Yes	Fig.2	4.5			7,400
		MEC 063R-17-5T	●	5	63	25.4	20	14	50	26	6	9.5		0.8						
		MEC 080R-17-6T	●	6	80				50					1.0						
		MEC 100R-17-7TN	●	7	100	31.75	26	17.6	63	32	8	12.7		1.8						
		MEC 125R-17-9T	●	9	125	38.1	45	32	63	38	10	15.9		3.4						
		MEC 160R-17-12T	●	12	160	50.8	70	-		47		19.1		4.5						
Fine pitch	MEC 063R-17-6T	●	6	63	25.4	20	14	50	26	6	9.5	15.7	Yes	Fig.1	0.8	SB-4070TRN	DTM-15	14,500		
	MEC 080R-17-8T	●	8	80				50											1.0	
	MEC 100R-17-9TN	●	9	100	31.75	26	17.6	63	32	8	12.7								1.8	

Coat Anti-seize Compound (P-37) thinly on portion of taper and thread when insert is fixed.

Caution with Max. Revolution

When running an endmill or a cutter at the maximum revolution, the insert or cutter may be damaged by centrifugal force. For more details, see "Warning" on page P13.

● : Stock Std. Recommended Cutting Conditions → P13

When using Center-through Air / Coolant / Mist

If Center Through air (Coolant, Mist) is used, please use appropriate arbor and clamp with arbor bolt. (Table1)

MEC's surface finish when shouldering with multiple passes

In order to obtain smoothly finished shoulder wall by multiple passes of MEC Milling Cutter, please keep ap less than 0.0217" (5.5mm) for 11T3 type insert and also keep ap less than 0.0354"(9mm) for 1704 type insert.


Description	Arbor clamp bolt (Attachment)	Wrench
MEC040R.....M	HH8 × 25H	LW-5(Double width 5mm)
MEC050R.....M MEC063R.....M	HH10 × 30H	LW-6(Double width 6mm)
MEC063R..... MEC080R..... MEC080R.....M	HH12 × 35H	LW-8(Double width 8mm)
MEC100R.....N MEC100R.....M	HH16 × 52H	LW-12(Double width 12mm)
MEC125R.....	HF20 × 53H	LW-14(Double width 14mm)
MEC160R.....	HF24 × 60H	LW-17(Double width 17mm)


Wrench is not included. Please purchase separately.

When using inserts with corner-R(re)1.6 or larger, additional modifications of the cutter body will be necessary. Ref. to the chart below for the recommended modifications. If corner-radius is 1.2mm, additional processing is not needed.

Insert Corner-R(re)	Additional modifications of the cutter body corner
1.6	R1.0
2.0	
2.4	R1.2
3.1	R1.6
4.0	R2.5

\* R shape is recommended for additional processing to the body corner. When applying chamfer shaped additional processing, do not cut away too much.

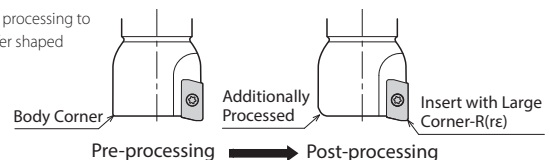

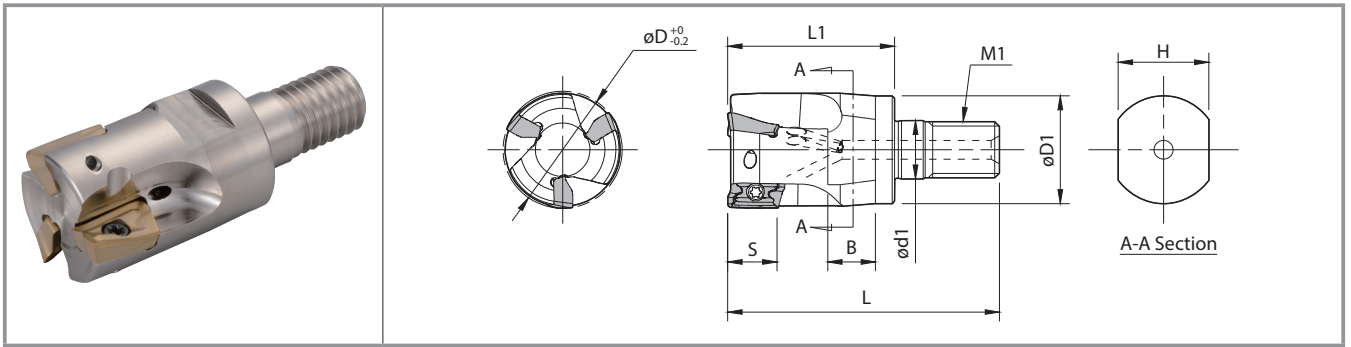

Dimensions




Description	Stock	No. of Inserts	Dimension (mm)									Rake Angle		Coolant Hole	Applicable Inserts ➔ P5,P6	Max. Revolution (min <sup>-1</sup> )
			$\phi D$	$\phi D1$	$\phi d1$	L	L1	M1	H	B	S	A.R. (MAX.)	R.R.			
MEC 16-M08-11T-2T	●	2	16	14.7	8.5	43	25	M8 × P1.25	12	8	10	+18°	-14°	Yes	BDMT11T3 BDGT11T3	43,750
20-M10-11T-2T	●		20	18.7	10.5	49	30	M10 × P1.5	15	9		+20°	-10°			41,000
20-M10-11T-3T	●	3	25	23	12.5	57	35	M12 × P1.75	19	10		+21°	-9°			37,500
25-M12-11T-3T	●											+23°	-9°			33,900
32-M16-11T-4T	●	4	32	30	17	63	40	M16 × P2.0	24	12		+23°	-9°			33,900
MEC 25-M12-17-2T	●	2	25	23	12.5	57	35	M12 × P1.75	19	10	15.7	+16°	-11°	Yes	BDMT1704 BDGT1704	35,000
32-M16-17-3T	●	3	32	30	17	63	40	M16 × P2.0	24	12		+17°	-7°			30,000

Caution with Max. Revolution

When running an endmill or a cutter at the maximum revolution, the insert or cutter may be damaged by centrifugal force. For more details, see "Warning" on page P13.

● : Stock Std.

Spare Parts


Description	Spare Parts			
	Clamp Screw	Wrench	Anti-seize Compound	
				
MEC 16-M08-11T-2T	SB-2555TRG	DTM-8	P-37	
20-M10-11T-2T				
20-M10-11T-3T				
25-M12-11T-3T				For Insert Screw Recommended torque 1.2N · m
32-M16-11T-4T				
MEC 25-M12-17-2T	SB-4070TRN	DTM-15	P-37	
32-M16-17-3T	For Insert Screw Recommended torque 3.5N · m			

Coat Anti-seize Compound (P-37) thinly on portion of taper and thread when insert is fixed.

Modular Endmill Head Identification System



## BT Arbor (for exchangeable head/two face contact)

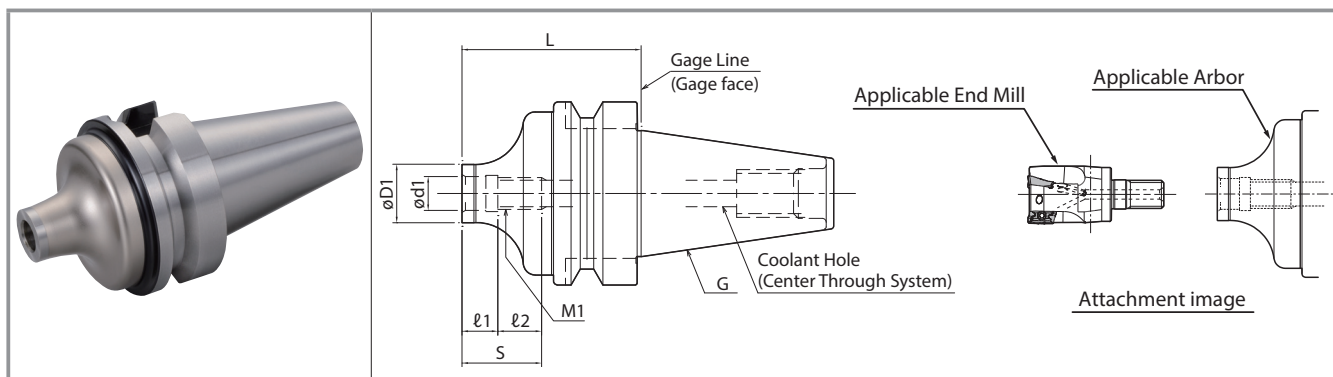

### Dimensions

Description	Stock	Dimension (mm)							Coolant Hole	Arbor (Double-face clamping)	Applicable End Mill (Head) → P10	
		L	øD1	ød1	S	ℓ1	ℓ2	M1				
BT30K-	M08-45	●	45	14.7	8.5	20	9	11	M8 × P1.25	Yes	BT30	MEC16-M08..
	M10-45	●		18.7	10.5	21		12	M10 × P1.5			MEC20-M10..
	M12-45	●		23	12.5	24		15	M12 × P1.75			MEC25-M12..
BT40K-	M08-55	●	55	14.7	8.5	20	9	11	M8 × P1.25	Yes	BT40	MEC16-M08..
	M10-60	●	60	18.7	10.5	21		12	M10 × P1.5			MEC20-M10..
	M12-55	●	55	23	12.5	24		15	M12 × P1.75			MEC25-M12..
	M16-65	●	65	30	17	25		16	M16 × P2.0			MEC32-M16..

●: Stock Std.

### Actual Endmill depth

Arbor Description	Applicable Endmill (Head)			Actual Endmill depth (mm)		
	Description	Cutting Dia.(mm)	Dimension (mm)	M	L2	
		øD	L1			
BT30K-	M08-45	MEC16-M08..	ø16	25	31.8	6.8
	M10-45	MEC20-M10..	ø20	30	36.8	
	M12-45	MEC25-M12..	ø25	35	42.8	
BT40K-	M08-55	MEC16-M08..	ø16	25	31.7	6.7
	M10-60	MEC20-M10..	ø20	30	38.7	8.7
	M12-55	MEC25-M12..	ø25	35	44.6	9.6
	M16-65	MEC32-M16..	ø32	40	51.2	11.2

### Arbor Identification System

**BT30**   **K**   -   **M08**   -   **45**


Arbor Size   Two-Face Clamping Spindle   Thread Size for Clamping   Length from the Gage



# Modular MEC Advantages (Mounted on BT Arbor)



## Low Gage Line Reduces Chattering

Though the overhang length is the same (30mm), MEC Modular has a shorter distance from the cutting edge to the gage line compared to other MEC End Mills.

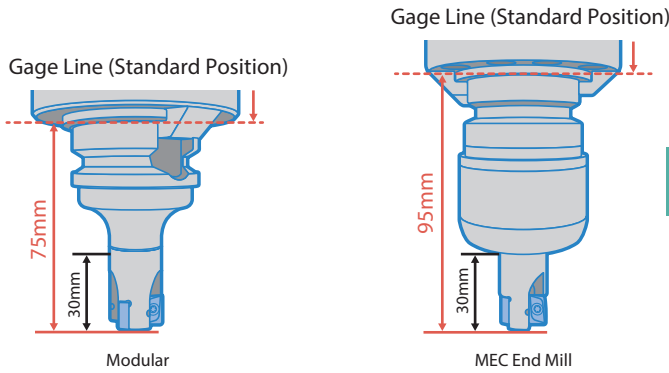


High efficiency and high quality machining in small machining centers (BT30/BT40, etc.).

## Toolholders with a Greater Number of Flutes vs. Toolholders with a Fewer Number of Flutes

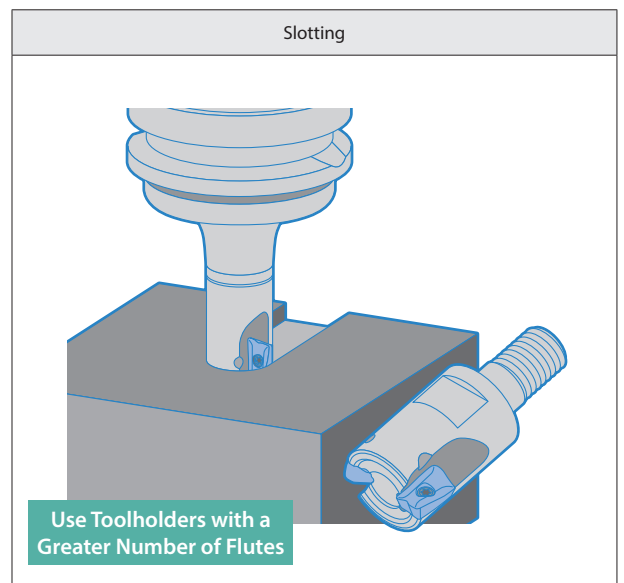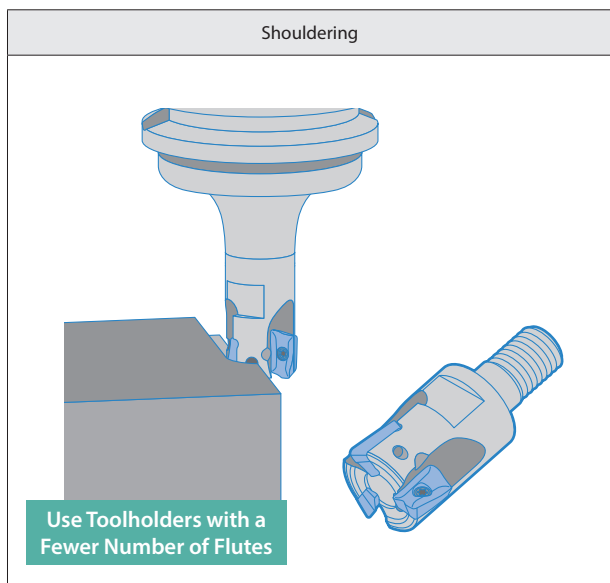


## MEC Modular Recommended Cutting Conditions

### Shouldering

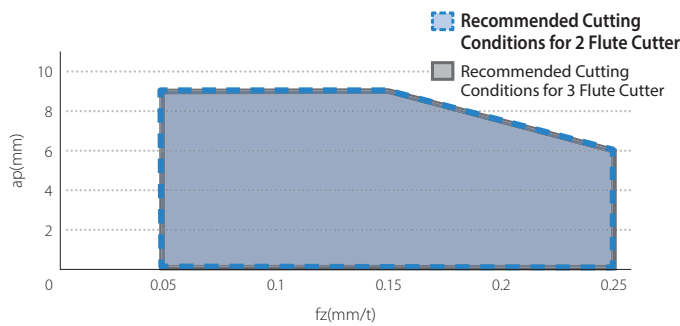

### Slotting

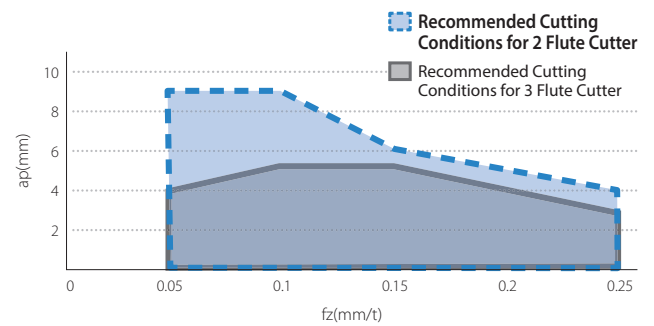

When shouldering, use cutters with a greater number of flutes for higher efficiency and higher feed rates.

When slotting use cutters with a fewer number of flutes to lower cutting forces.

# MEC Recommended Cutting Conditions ★ : 1st Recommendation ☆ : 2nd Recommendation

## JT Chipbreaker

Workpiece Material	fz (mm/t)		Recommended Insert Grades (Vc m/min)					
	Holder		Cermet	MEGACOAT NANO	MEGACOAT		PVD Coated Carbide	CVD Coated Carbide
	MEC10~MEC19	MEC20~MEC40 MEC032R~MEC160R	TN100M	PR1535	PR1225	PR1210	PR830	CA6535
Carbon Steel	0.06 - 0.1 - 0.15	0.08 - 0.15 - 0.25	☆ 120 - 160 - 200	☆ 120 - 180 - 250	★ 120 - 180 - 250	—	☆ 120 - 160 - 200	—
Alloy Steel	0.06 - 0.1 - 0.12	0.08 - 0.15 - 0.2	☆ 100 - 140 - 180	☆ 100 - 160 - 220	★ 100 - 160 - 220	—	☆ 100 - 140 - 180	—
Mold Steel	0.06 - 0.08 - 0.1	0.08 - 0.12 - 0.2	☆ 80 - 120 - 150	☆ 80 - 140 - 180	★ 80 - 140 - 180	—	☆ 80 - 120 - 150	—
Austenitic Stainless Steel	0.06 - 0.08 - 0.1	0.08 - 0.12 - 0.15	—	☆ 100 - 160 - 200	☆ 100 - 160 - 200	—	☆ 100 - 140 - 180	—
Martensitic Stainless Steel	0.06 - 0.08 - 0.1	0.08 - 0.12 - 0.2	—	☆ 150 - 200 - 250	—	—	—	★ 180 - 240 - 300
Precipitation Hardened Stainless Steel	0.06 - 0.08 - 0.1	0.08 - 0.12 - 0.2	—	★ 90 - 120 - 150	—	—	—	—
Gray Cast Iron	0.06 - 0.1 - 0.15	0.08 - 0.18 - 0.25	—	—	—	★ 120 - 180 - 250	—	—
Nodular Cast Iron	0.06 - 0.08 - 0.1	0.08 - 0.15 - 0.2	—	—	—	★ 100 - 150 - 200	—	—
Ni-base Heat Resistant Alloy	0.06 - 0.08 - 0.1	0.08 - 0.12 - 0.15	—	★ 20 - 30 - 50	—	—	—	☆ 20 - 30 - 50
Titanium Alloy	0.06 - 0.08 - 0.1	0.08 - 0.15 - 0.2	—	☆ 40 - 60 - 80	—	☆ 30 - 50 - 70	—	—

Cutting with coolant is recommended for Ni-base Heat Resistant Alloy and Titanium Alloy.

## JS Chipbreaker

Workpiece Material	fz (mm/t)		Insert Grades (Cutting Speed Vc m/min)			
	Holder		MEGACOAT NANO	MEGACOAT	PVD Coated Carbide	CVD Coated Carbide
	MEC10~MEC19	MEC20~MEC40 MEC032R~MEC160R	PR1535	PR1225	PR830	CA6535
Stainless Steel	0.06 - 0.1 - 0.12	0.08 - 0.15 - 0.18	☆ 120 - 180 - 250	★ 120 - 180 - 250	☆ 120 - 160 - 200	—
Carbon Steel	0.06 - 0.08 - 0.1	0.08 - 0.12 - 0.15	☆ 100 - 160 - 220	★ 100 - 160 - 220	☆ 100 - 140 - 180	—
Mold Steel	0.06 - 0.08 - 0.1	0.08 - 0.1 - 0.12	☆ 80 - 140 - 180	★ 80 - 140 - 180	☆ 80 - 120 - 150	—
Austenitic Stainless Steel	0.06 - 0.08 - 0.1	0.08 - 0.1 - 0.12	★ 100 - 160 - 200	☆ 100 - 160 - 200	☆ 100 - 140 - 180	—
Martensitic Stainless Steel	0.06 - 0.08 - 0.1	0.08 - 0.1 - 0.12	☆ 150 - 200 - 250	—	—	★ 180 - 240 - 300
Precipitation Hardened Stainless Steel	0.06 - 0.08 - 0.1	0.08 - 0.1 - 0.12	☆ 90 - 120 - 150	—	—	—
Ni-base Heat Resistant Alloy	0.06 - 0.08 - 0.1	0.08 - 0.1 - 0.12	★ 20 - 30 - 50	—	—	☆ 20 - 30 - 50
Titanium Alloy	0.06 - 0.08 - 0.1	0.08 - 0.1 - 0.12	☆ 40 - 60 - 80	—	—	—

Cutting with coolant is recommended for Ni-base Heat Resistant Alloy and Titanium Alloy.

## JA Chipbreaker

Workpiece Material	fz(mm/t)	Insert Grades (Cutting Speed: Vc m/min)	
		DLC Coated Carbide	Carbide
		PDL025	GW25
Aluminium Alloys (Si 13% or below)	0.05 - 0.3	200 - 1,000	200 - 800
Aluminium Alloys (Si 13% or above)	0.05 - 0.2	200 - 300	200 - 300

## PCD

Workpiece Material	fz(mm/t)	Insert Grades (Cutting Speed: Vc m/min)
		PCD
		KPD230 (KPD001)
Aluminium Alloys (Si 13% or below)	0.05 - 0.2	500 - 1,500
Aluminium Alloys (Si 13% or above)	0.05 - 0.15	300 - 1,000

### Warning

Please observe below precautions fully. Failure to observe the precautions may cause serious amage to human body.

#### Warning about Max. Revolution indicated on main body


- When running the endmill and the face mill at revolutions exceeding the maximum revolution limit, the inserts or toolholder may be damaged due to the centrifugal force.
- For actual practical revolution, please set within recommended cutting condition.
- When using at a higher revolution (over 10,000min<sup>-1</sup>), refer to the table to adjust the balance of MEC and suitable arbor.

Max. Revolution (min <sup>-1</sup> )	Balance quality grade GISO 1940-1 / 8821 (JIS B0905)
~20,000	G16
~30,000	G6.3
30,000~	G2.5

## Ramping, Helical milling and Vertical milling

**Ramping, Helical Milling**


- Ramping Angle should be Under  $\alpha^\circ$
- For plunge depth per revolution when helical milling, see the cutting performance data of each tool.  
Use compressed air during machining.

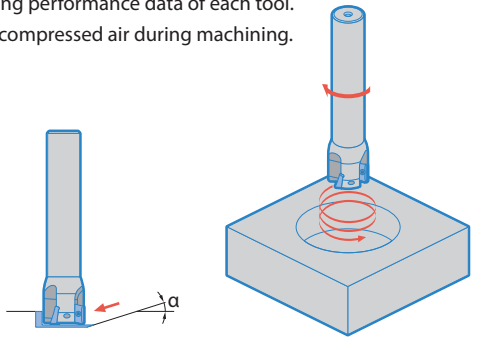

Cutting Dia.	Applicable Insert	Max.Ramping Angle( $\alpha^\circ$ )
$\phi 16 - \phi 18$	BDMT11T3 type BDGT11T3 type	3°
$\phi 19 - \phi 21$		5°
$\phi 22 - \phi 25$		2.5°
$\phi 28 - \phi 32$		1.5°
$\phi 40$		0.7°
$\phi 50$ over		Not recommended
$\phi 25$	BDMT1704 type BDGT1704 type	8°
$\phi 32$		5°
$\phi 40$		2.5°
$\phi 50$ over		Not recommended

BDMT1103 inserts are not recommended for Slant Milling or Helical Milling.

**Vertical Milling**

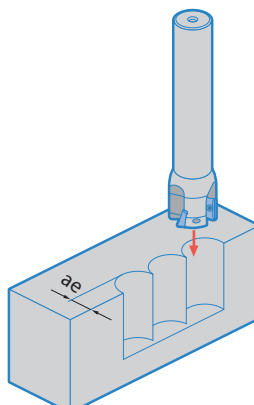

Cutting Dia.	Applicable Insert	Max. W.O.C. (ae)
$\phi 16 - \phi 19$	BDMT11T3 type BDGT11T3 type	1.5 mm
$\phi 20 - \phi 160$	BDMT11T3 type BDGT11T3 type	5 mm
$\phi 25 - \phi 160$	BDMT1704 type BDGT1704 type	8 mm

BDMT1103 inserts are not recommended for Vertical Milling.

## Guidance of minimum cutting dia by helical machining

MEC	Holder Dia.	$\phi 16$	$\phi 18$	$\phi 20$	$\phi 22$	$\phi 25$	$\phi 28$	$\phi 30$	$\phi 32$	$\phi 40$	$\phi 50$
BD_T11T3 type	Guidance of minimum cutting dia by helical machining.	$\phi 21$	$\phi 25$	$\phi 29$	$\phi 33$	$\phi 39$	$\phi 45$	$\phi 49$	$\phi 53$	$\phi 69$	Helical machining is not recommended.
	Guidance of minimum cutting dia in case of flatting bottom after helical machining.	$\phi 28$	$\phi 32$	$\phi 36$	$\phi 40$	$\phi 46$	$\phi 52$	$\phi 56$	$\phi 60$	$\phi 76$	

MEC	Holder Dia.	$\phi 25$	$\phi 32$	$\phi 40$	$\phi 50$
BD_T1704 type	Guidance of minimum cutting dia by helical machining.	$\phi 34$	$\phi 48$	$\phi 64$	Helical machining is not recommended.
	Guidance of minimum cutting dia in case of flatting bottom after helical machining.	$\phi 46$	$\phi 60$	$\phi 76$	

# Cutting Performance of MEC Endmill (JT Chipbreaker)


## ① Cutting Edge Length 10mm (Standard/Same Size Shank)

Cutting Dia.	Description	Overhang Length A (mm)		Shape
ø10	MEC10-S10-11	17	—	
ø12	MEC12-S16-11	20	30	
ø16	MEC16-S16-11T	30	45	
ø20	MEC20-S20-11T	30	45	
ø25	MEC25-S25-11T	32	48	
ø32	MEC32-S32-11T	40	60	


## ② Cutting Edge Length 10mm (Long Shank)

Cutting Dia.	Description	Overhang Length A (mm)		Shape
ø20 Long Shank	MEC20-S20-140-11T	60	90	
ø25 Long Shank	MEC25-S25-160-11T	60	100	
ø32 Long Shank	MEC32-S32-200-11T	100	130	
ø40 Long Shank	MEC40-S32-240-11T	100	130	

[Vc=120m/min Work Material : S50C]

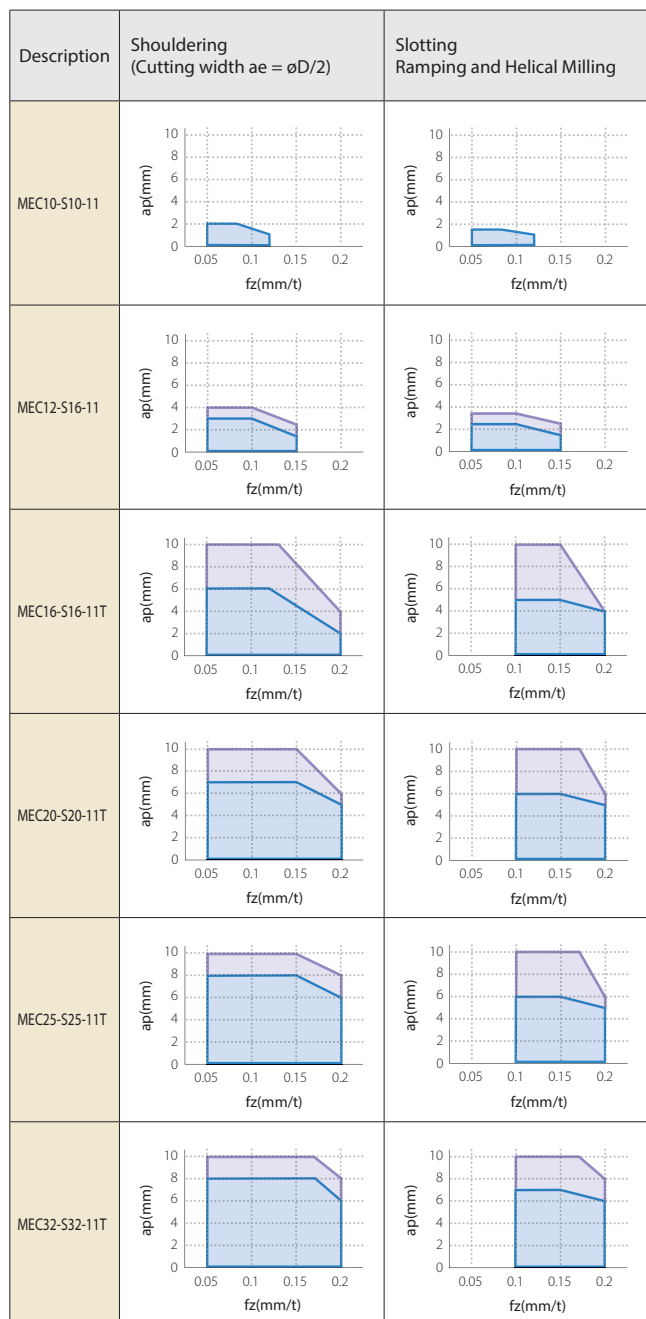

[Vc=120m/min Work Material : S50C]

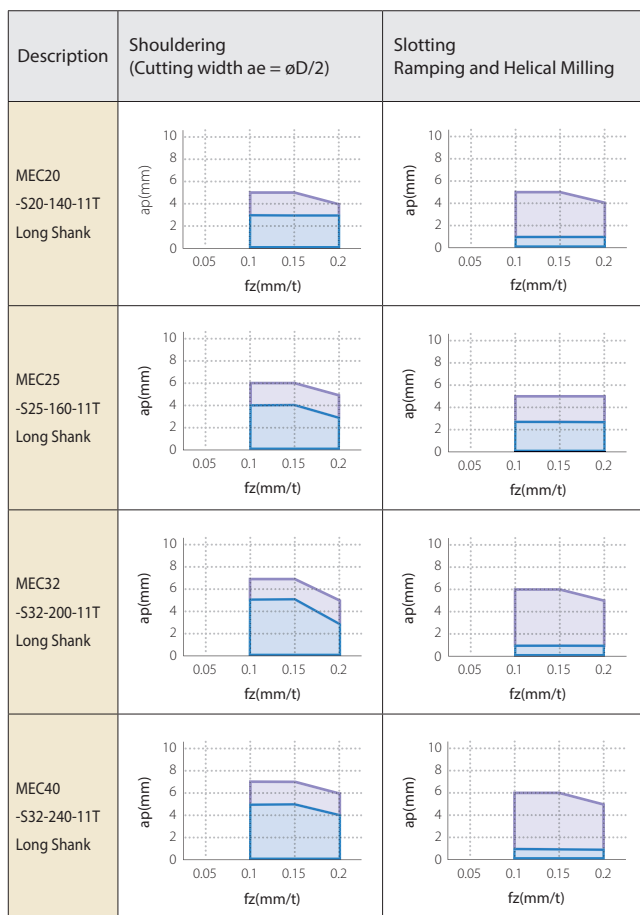



③ Cutting Edge Length 15.7mm

[Vc=120m/min Work Material : S50C]

Cutting Dia.	Description	Overhang Length A (mm)	
		36	54
ø25	MEC25-S25-17	36	54
ø32	MEC32-S32-17	40	60
ø40	MEC40-S32-17	50	75
ø25 Long Shank	MEC25-S25-160-17	60	100
ø32 Long Shank	MEC32-S32-200-17	100	130
ø40 Long Shank	MEC40-S32-240-17	100	130

Shape

Description	Shouldering (Cutting width ae = øD/2)	
	Shouldering (Cutting width ae = øD/2)	Slotting Ramping and Helical Milling
MEC25-S25-17		
MEC32-S32-17		
MEC40-S32-17		
MEC25-S25-160-17 Long Shank		
MEC32-S32-200-17 Long Shank		
MEC40-S32-240-17 Long Shank		

# Cutting Performance of MEC Milling Cutter (JT Chipbreaker)

Cutting Edge Length 10mm

[Vc=120m/min Work Material : S50C]

Cutting Dia.	Description	Overhang Length A (mm)
ø40	MEC040R-11-5T-M	115
ø50	MEC050R-11-○T-M	100
ø63	MEC063R-11-○T	95
	MEC063R-11-○T-M	
ø80	MEC080R-11-○T	95
ø100	MEC100R-11-9TN	108
ø125	MEC125R-11-11T	
ø160	MEC160R-11-14T	

Shape

Description	Shouldering (Cutting width $a_e = \phi D/2$ )	Slotting
MEC040R -11-5T-M		
MEC050R -11-○T-M } MEC100R -11-9TN		
MEC125R -11-11T MEC160R -11-14T		

Cutting Edge Length 15.7mm

[Vc=120m/min Work Material : S50C]

Cutting Dia.	Description	Overhang Length A (mm)
ø40	MEC040R-17-4T-M	115
ø50	MEC050R-17-○T-M	100
ø63	MEC063R-17-○T	95
	MEC063R-17-○T-M	
ø80	MEC080R-17-○T	95
ø100	MEC100R-17-○TN	108
ø125	MEC125R-17-9T	
ø160	MEC160R-17-12T	


Shape

Description	Shouldering (Cutting width $a_e = \phi D/2$ )	Slotting
MEC040R -17-4T-M		
MEC050R -17-○T-M		
MEC063R -17-○T(-M) } MEC100R -17-○TN		
MEC125R -17-9T MEC160R -17-12T		

## MEC Case Studies

### RC55(Prehardened Tool Steel)

Test Piece (54 - 56HRC)  
 $V_c = 50 \text{ m/min}$  ( $n = 800 \text{ min}^{-1}$ )  
 $f_z = 0.125 \text{ mm/t}$  ( $V_f = 300 \text{ mm/min}$ )  
 $ap \times ae = 2 \times 14 \text{ mm}$   
 Dry  
 MEC20-S20-11T (3 Teeth)  
 BDMT11T308ER-JT (PR830)



Metal Removal Volume

**MEC**

**71.3 cm<sup>3</sup> (continuable)**

**Tool Life**

**24 Times**

Competitor N  
 (Endmill)


**2.9 cm<sup>3</sup> (Chipping)**

Competitor N ( $\phi 25 : 2$  Teeth) caused chipping after 10 minutes machining with the conditions of  $V_c=40\text{m/min}$ ,  $f_z=0.075\text{mm/t}$ ,  $ap \times ae=2 \times 3\text{mm}$ , and it was noisy. Also, higher feed rate was not possible because it would cause breakage. MEC maintained a good edge condition even after 10 minutes and was still available for further machining.

(User Evaluation)

### SS400

Plate  
 $V_c = 88 \text{ m/min}$  ( $n = 1,400 \text{ min}^{-1}$ )  
 $f_z = 0.12 \text{ mm/t}$  ( $V_f = 500 \text{ mm/min}$ )  
 $ap = 5 \text{ mm} \times 2$  Passes  
 Dry  
 MEC20-S20-11T (3 Teeth)  
 BDMT11T308ER-JT (PR830)



Number of Workpieces

**MEC**

**23 pcs/edge**

**Tool Life**

**2 Times**

Competitor O  
 (Endmill)


**10~11 pcs/edge**

MEC doubled Competitor O's tool life under the same machining conditions.

(User Evaluation)

### SUS304

Plate  
 $V_c = 125 \text{ m/min}$  ( $n = 1,600 \text{ min}^{-1}$ )  
 $f_z = 0.1 \text{ mm/t}$  ( $V_f = 320 \text{ mm/min}$ )  
 $ap = 9.0 \text{ mm}$   
 Dry  
 MEC25-S25-17 (2 Teeth)  
 BDMT170408ER-JT (PR830)



Number of Workpieces

**MEC**

**4 pcs/edge or over**

**Tool Life**

**4 Times**

Competitor P  
 (Endmill)


**Under 1 pc/edge**

Competitor M showed higher cutting forces and caused cracking to the cutting edge. MEC produced 4 pcs/edge without cracking.

(User Evaluation)

### Hot Tool Steel

Mold  
 $V_c = 130 \text{ m/min}$  ( $n = 1,040 \text{ min}^{-1}$ )  
 $f_z = 0.18 \text{ mm/t}$  ( $V_f = 936 \text{ mm/min}$ )  
 $ap \times ae = 3 \times 5$   
 (depends on machined part)  
 Dry (with air)  
 MEC40-S32-11T (5 teeth)  
 BDMT11T308ER-JT (PR830)



Cutting Time

**MEC**

**2 Hours (Less Wear/Can Continue)**

**Tool Life**

**Same or More**

Competitor Q  
 (Endmill)


**2 Hours (Cracking/Cannot Continue)**

MEC tool life was better than Competitor Q. MEC's wear was less and able to machine further. Competitor mill had 6 teeth and its table feed rate was 936mm/min. ( $f_z=0.15\text{mm/t}$ )

(User Evaluation)

### SCM420

Knuckle Steering  
 $V_c = 150 \text{ m/min}$  ( $n = 1,200 \text{ min}^{-1}$ )  
 $f_z = 0.1 \text{ mm/t}$  ( $V_f = 478 \text{ mm/min}$ )  
 $ap = 0.5 - 5 \text{ mm}$  (Shouldering)  
 Dry  
 MEC40-S32-17 (4 teeth)  
 BDMT170408ER-JT (PR830)



Number of Workpieces

**MEC**

**150 pcs/edge**

**Tool Life**

**3 Times**

Competitor R  
 (Endmill)


**40 pcs/edge**

MEC surface finish was better than the Competitor end mill R and the tool life was over 3 times longer.

(User Evaluation)

### Ni-base Heat Resistant Alloy

Turbine Part  
 $V_c = 15 \text{ m/min}$  ( $n = 120 \text{ min}^{-1}$ )  
 $f_z = 0.08 \text{ mm/t}$  ( $V_f = 38 \text{ mm/min}$ )  
 $ap = 0.5 \text{ mm}$   
 Wet  
 MEC40R-17-4T-M (4 teeth)  
 BDMT170408ER-JS PR1025



Number of Workpieces

**MEC**

**9 pcs/edge**

**Tool Life**

**9 Times**


Competitor S  
 (Endmill)

**Less than 1 pc/edge**

Competitor S was not able to successfully machine one piece, but the MEC produced 9 pieces with good surface finishes.

(User Evaluation)

# MECH Endmill with Cylindrical Shank (with coolant hole for bottom insert)

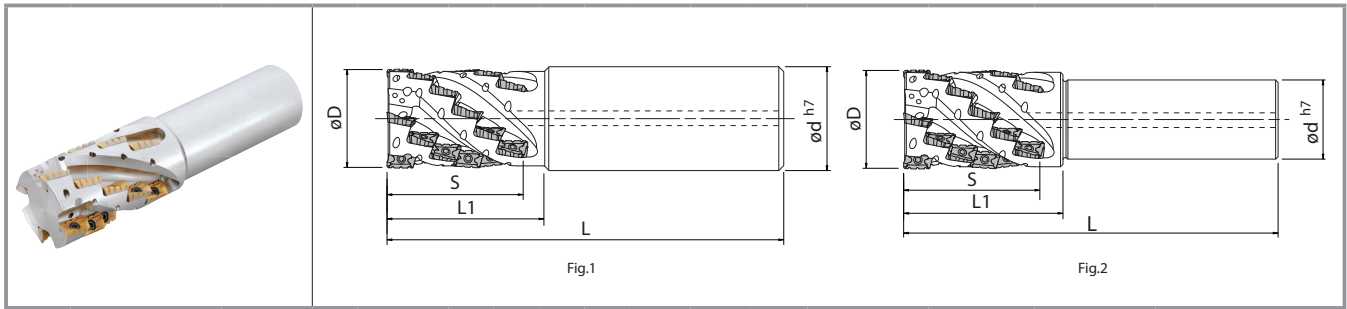


## Dimensions (metric-size)

Description	Stock	No. of Flutes	No. of Stages	No. of Inserts	Dimension (mm)					Rake Angle		Insert	Spare Parts			Applicable Inserts ➔ P5
					øD	ød	L	L1	S	A.R. (MAX.)	R.R.		Insert Screw	Wrench	Anti-seize Compound	
MECH 025-S25-11-4-2T	●	2	4	8	25	25	120	46	37	+21°	-10°	Fig.1	SB-2555TRG	DTM-8	P-37	BDMT11T308ER-N2 BDMT11T308ER-N3
032-S32-11-5-2T	●		5	10	32	32	140	55	46		-9°					
032-S32-11-5-4T	●		20													
040-S32-11-6-4T	●	4	6	24	40	150	64	55	+23°	-8°	Fig.2					
040-S42-11-6-4T	●			28							Fig.1					
050-S42-11-7-4T	●		42								Fig.2					
050-S42-11-7-6T	●	6	7	28	50	172	75	64		-7°	Fig.2					
			42													
MECH 040-S32-17-4-2T	●	2	4	8	40	32	160	73	59	+19°	-7°	Fig.2	SB-4070TRN	DTM-15	P-37	BDMT170408ER-N3 BDMT170408ER-N4
040-S42-17-4-2T	●			5	20	50	42	170								
050-S42-17-5-4T	●		4	20	50	42	185	88	74			-6°				

Coat Anti-seize Compound (MP-1) thinly on clamp screw when insert is fixed.

● : Stock Std.  
Recommended Cutting Conditions ➔ P24

# MECH Shell Mill (without coolant hole)

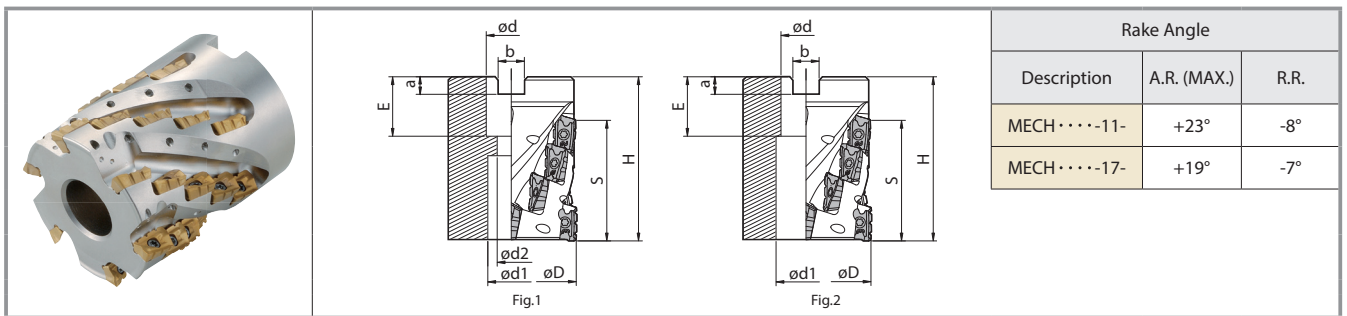

## Dimensions


Description	Stock	No. of Flutes	No. of Stages	No. of Inserts	Dimension (mm)										Insert	Spare Parts				Arbor Bolt ➔ P5				
					øD	ød	ød1	ød2	H	E	a	b	S	Insert Screw		Wrench	Anti-seize Compound	Applicable Inserts						
MECH 040R-11-4-4T-M	●	4	4	16	40	16	15	9	50	19	5.6	8.4	37	Fig.1	SB-2555TRG	DTM-8	P-37	HH8X25	BDMT11T308ER-N2					
050R-11-5-6T-M	●	6	5	30	50	22	18	11	63	21	6.3	10.4	46					HH10X30	BDMT11T308ER-N3					
MECH 050R-17-2-4T-M	●	4	2	8	50	22	18	11	52	21	6.3	10.4	30	Fig.1	SB-4070TRN	DTM-15	P-37	HH10X30	BDMT170408ER-N3 BDMT170408ER-N4					
050R-17-4-4T-M	●		4	16					78				59											
063R-17-3-4T-M	●	4	3	12	63	27	20	14	70	24	7	12.4	45					HH12X35						
080R-17-4-6T-M	●	6	4	24	80	32	26	18	85	28	8	14.4	59					HH16X45						
100R-17-4-6T-M	●				100	40	56	-	85	30	9	16.4						-						
MECH 063R-17-3-4T	●	4	3	12	63	25.4	20	14	70	26	6	9.5	45					Fig.1		SB-4070TRN	DTM-15	P-37	HH12X35	BDMT170408ER-N3 BDMT170408ER-N4
080R-17-4-6T	●	6	4	24	80	31.75	26	18	85	32	8	12.7	59					Fig.1					SB-4070TRN	
100R-17-4-6T	●				100	38.1	56	-	85	38	10	15.9		-	Fig.2									

Coat Anti-seize Compound (MP-1) thinly on clamp screw when insert is fixed.

● : Stock Std.  
Recommended Cutting Conditions ➔ P24



# MECH-BT50 (Integral Arbor type, without coolant hole)

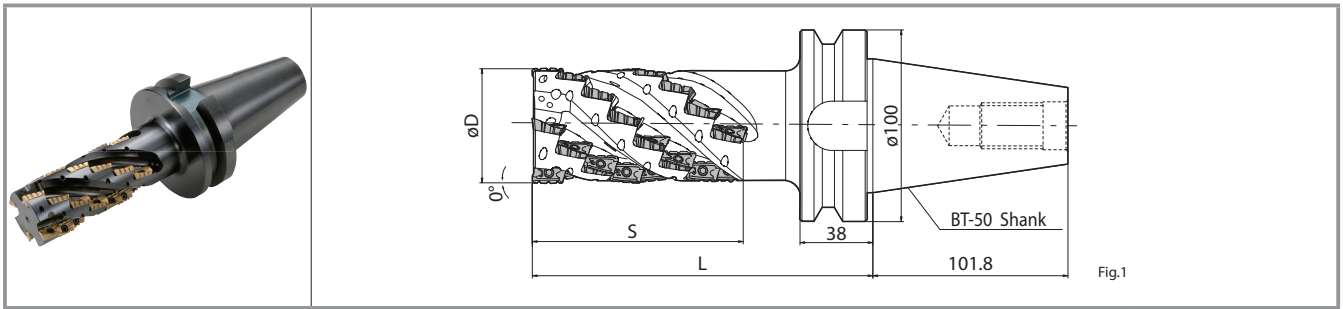

## Dimensions

Description	Stock	No. of Flutes	No. of Stages	No. of Inserts	Dimension (mm)			Rake Angle		Insert	Spare Parts			Applicable Inserts ➔ P5
					øD	L	S	A.R. (MAX.)	R.R.		Insert Screw	Wrench	Anti-seize Compound	
MECH 050R11-8-4T-BT50	●	4	8	32	50	143	73	+23°	-7°	Fig.1	SB-2555TRG	DTM-8	P-37	BDMT11T308ER-N2 BDMT11T308ER-N3
MECH 050R17-7-4T-BT50	●	4	7	28	50	173	104	+19°	-7°		SB-4070TRN	DTM-15	P-37	BDMT170408ER-N3 BDMT170408ER-N4
063R17-7-4T-BT50	●				63									
080R17-7-4T-BT50	●				80									
100R17-7-6T-BT50	●	6	42	100										


Coat Anti-seize Compound (MP-1) thinly on clamp screw when insert is fixed.

Recommended Cutting Conditions ➔ P24

## MECH Case Studies

### Ship parts S45C

Vc = 150 m/min (n = 955 min<sup>-1</sup>)  
 ap x ae = 70 mm x 10 mm  
 fz = 0.2 mm/t (Vf = 764 mm/min)  
 Dry  
 MECH050-S42-17-5-4T(4 Flutes)  
 BDMT170408ER-N3  
 BDMT170408ER-N4  
 (PR830)



Metal Removal Volume

**MECH**

**534 cc/min**

Productivity

**4.6**  
Times

Competitor T


**115 cc/min**

MECH machining efficiency improved 4.6 times that of Competitor T

(User Evaluation)

### Plate SS400

Vc = 150 m/min (n = 955 min<sup>-1</sup>)  
 ap x ae = 70 mm x 10 mm  
 fz = 0.2 mm/t (Vf = 760 mm/min)  
 Dry  
 MECH050-S42-17-5-4T(4 Flutes)  
 BDMT170408ER-N3  
 BDMT170408ER-N4  
 (PR830)



Metal Removal Volume

**MECH**

**532 cc/min**

Productivity

**3.1**  
Times

Competitor U


**170 cc/min**

MECH machining efficiency improved 3.1 times that of Competitor U and had an excellent wall finish


(User Evaluation)

# MECH Interchangeable Head

MECH-BT50SA (Without a coolant hole) Arbor Integral Type (Base Unit+1 Front Piece+Arbor Bolt)

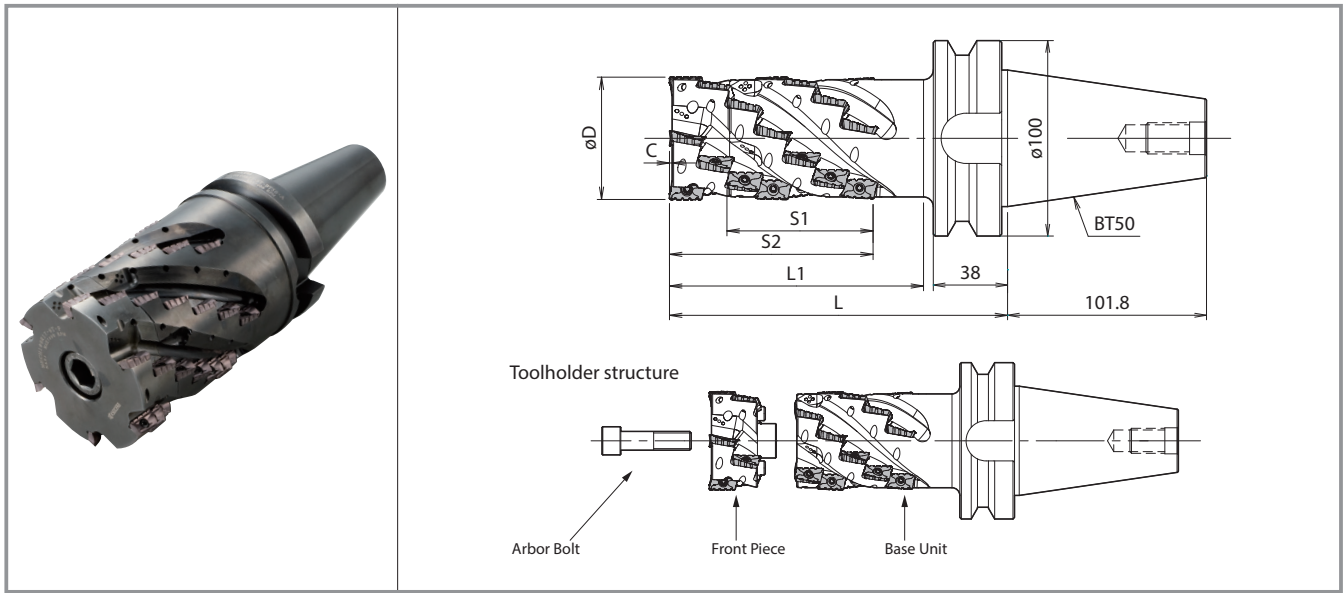

MECH-BT50-A (Without a coolant hole) Base Unit

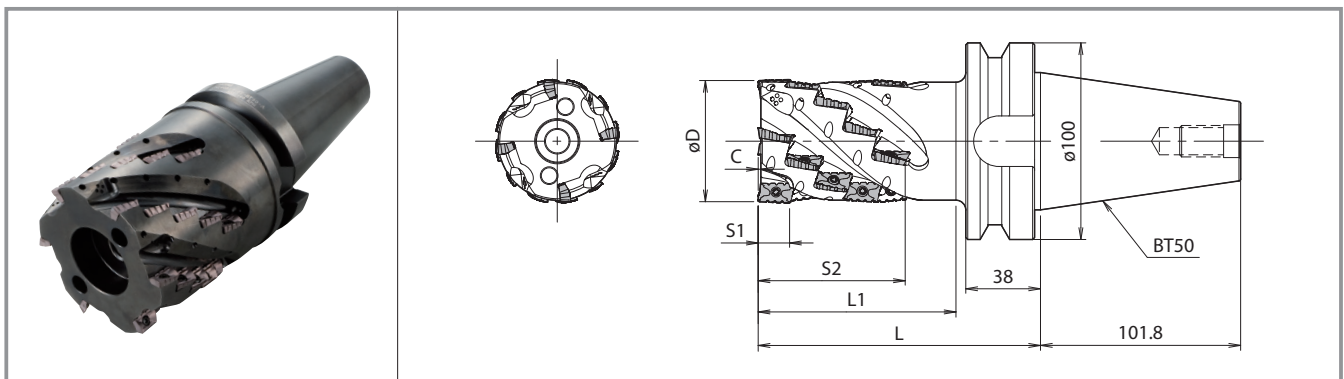

## Toolholder Dimensions

Arbor Integral Type	Description	Stock	No. of Flutes	No. of Stages	No. of Inserts	Dimension (mm)						Rake Angle		Weight (kg)
						øD	L	L1	C	S1	S2	A.R.	R.R.	
Arbor Integral Type	MECH 050R11-4T-BT50SA	MTO	4	8	32	50	143	99	0.7	55	73	+23°	-7°	4.8
	063R17-4T-BT50SA	MTO		7	28	63	173	130	1.3	75	104	+19°	-7°	5.8
	080R17-4T-BT50SA	MTO		80	7.6									
	100R17-6T-BT50SA	MTO		6	7	42	100	9.8						
Base Unit	MECH 050R11-4T-BT50-A	MTO	4	6	24	50	125	81	0.7	10	55	+23°	-7°	4.6
	063R17-4T-BT50-A	MTO		5	20	63	143	100	1.3	16	75	+19°	-7°	5.4
	080R17-4T-BT50-A	MTO				80								6.8
	100R17-6T-BT50-A	MTO		6	5	30	100	8.5						


MTO : Made to order  
For recommended cutting conditions, see page →P24

## Toolholder structure

Endmill		=	Base Unit → P21		+	Front Piece (1pcs) → P22		+	Arbor Bolt	
MECH	050R11-4T-BT50SA		MECH050R11-4T-BT50-A	MECH050R11-4T-F		HH12X35				
	063R17-4T-BT50SA	MECH063R17-4T-BT50-A	MECH063R17-4T-F	HH12X40						
	080R17-4T-BT50SA	MECH080R17-4T-BT50-A	MECH080R17-4T-F	HH16X40						
	100R17-6T-BT50SA	MECH100R17-6T-BT50-A	MECH100R17-6T-F	HH20X40						

# MECH Interchangeable Head

## MECH-F (Without a coolant hole) Front Piece

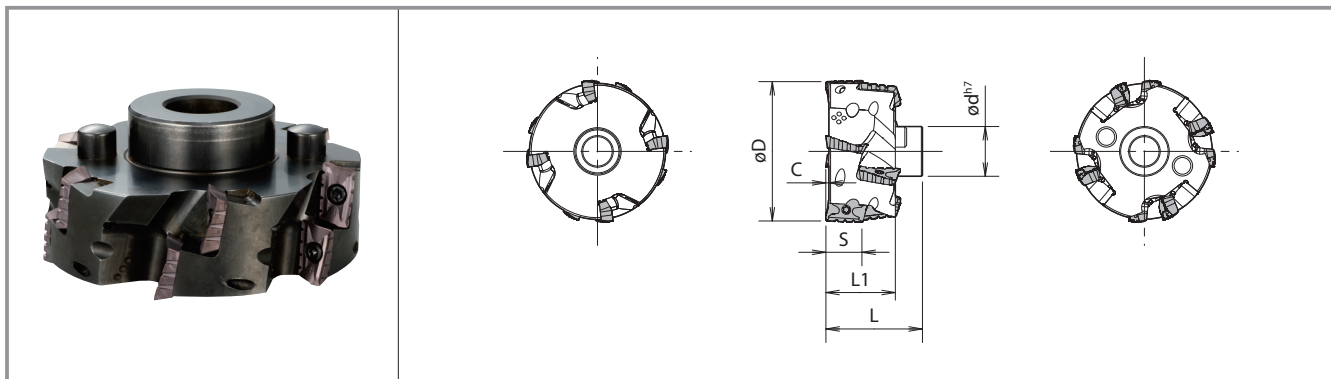

## Toolholder Dimensions

Description	Stock	No. of Flutes	No. of Stages	No. of Inserts	Dimension (mm)						Rake Angle		Weight (kg)
					øD	ød	L	L1	C	S	A.R.	R.R.	
MECH 050R11-4T-F	●	4	2	8	50	22	32	18	0.7	10	+23°	-7°	0.2
063R17-4T-F	●				63	22							0.4
080R17-4T-F	●				80	32	44	30	1.3	16	+19°	-7°	0.8
100R17-6T-F	●	6	2	12	100	45							1.3

● : Stock Std.

## Applicable Inserts

Endmill	Base Unit	Front Piece	Applicable Inserts → P5
MECH 050R11-4T-BT50SA	MECH050R11-4T-BT50-A	MECH050R11-4T-F	BDMT11T308ER-N2 BDMT11T308ER-N3
063R17-4T-BT50SA	MECH063R17-4T-BT50-A	MECH063R17-4T-F	BDMT170408ER-N3 BDMT170408ER-N4
080R17-4T-BT50SA	MECH080R17-4T-BT50-A	MECH080R17-4T-F	
100R17-6T-BT50SA	MECH100R17-6T-BT50-A	MECH100R17-6T-F	

For installation of notched insert, ref. page 23.

## Spare Parts

Description		Spare Parts				
		Insert Screw	Wrench (for Insert Screw)	Arbor Bolt	Wrench (for Arbor Bolt)	Anti-seize Compound
Arbor Integral Type (Set)	MECH 050R11-4T-BT50SA	SB-2555TRG	DTM-8	HH12X35	LW-10	P-37
	063R17-4T-BT50SA	SB-4070TRN	DTM-15	HH12X40		
	080R17-4T-BT50SA			HH16X40		
	100R17-6T-BT50SA			HH20X40	LW-17	
Base Unit	MECH 050R11-4T-BT50-A	SB-2555TRG	DTM-8	HH12X35	LW-10	
	063R17-4T-BT50-A	SB-4070TRN	DTM-15	HH12X40		
	080R17-4T-BT50-A			HH16X40	LW-14	
	100R17-6T-BT50-A			HH20X40	LW-17	
Front Piece	MECH 050R11-4T-F	SB-2555TRG	—	—	—	
	063R17-4T-F	SB-4070TRN				
	080R17-4T-F					
	100R17-6T-F					

If you purchased the front piece only, wrench (for insert screw) / arbor bolt and wrench (for arbor bolt) is not included.  
Coat Anti-seize Compound (P-37) thinly on clamp screw when insert is fixed.

# MECH Interchangeable Head

## Number of Inserts Installed





Description	No. of Flutes	No. of Inserts	No. of Inserts			
			BDMT11T308ER-		BDMT170408ER-	
			N2	N3	N3	N4
MECH 025-S25-11-4-2T	2	8	4	4		
032-S32-11-5-2T		10	5	5		
032-S32-11-5-4T	4	20	10	10		
040-S32-11-6-4T		24	12	12		
040-S42-11-6-4T	6	28	14	14		
050-S42-11-7-4T		42	21	21		
050-S42-11-7-6T						
MECH 040-S32-17-4-2T	2	8			4	4
040-S42-17-4-2T						
050-S42-17-5-4T	4	20			10	10
MECH 040R-11-4-4T-M	4	16	8	8		
050R-11-5-6T-M	6	30	15	15		
MECH 050R-17-2-4T-M	4	8			4	4
050R-17-4-4T-M		16			8	8
063R-17-3-4T-M	6	12			6	6
080R-17-4-6T-M		24			12	12
100R-17-4-6T-M						
MECH 063R-17-3-4T	4	12			6	6
080R-17-4-6T	6	24			12	12
100R-17-4-6T						
MECH 050R11-8-4T-BT50	4	32	16	16		
050R17-7-4T-BT50		28			14	14
063R17-7-4T-BT50	6				21	21
080R17-7-4T-BT50						
100R17-7-6T-BT50		42				

Description	No. of Flutes	No. of Inserts	No. of Inserts			
			BDMT11T308ER-		BDMT170408ER-	
			N2	N3	N3	N4
MECH 050R11-4T-BT50SA	4	32	16	16		
063R17-4T-BT50SA	4	28			14	14
080R17-4T-BT50SA						
100R17-6T-BT50SA		42			21	21
MECH 050R11-4T-BT50-A	4	24	12	12		
063R17-4T-BT50-A	4	20			10	10
080R17-4T-BT50-A						
100R17-6T-BT50-A	6	30			15	15
MECH 050R11-4T-F	4	8	4	4		
063R17-4T-F	4	8			4	4
080R17-4T-F						
100R17-6T-F	6	12			6	6

## Precautions when installing notched inserts

1. Install notched inserts by matching the insert with the number of marks on the holder body.

### Insert Number and Holder Marks

Insert Size	11 Type		17 Type	
Insert No.	2	3	3	4
Marks				

Using the cutter with the inserts installed incorrectly will damage the holder.

2. When installing notched inserts in flute line, ensure that the number on the insert is the same as the insert in first stage. Ref. to Fig.1, 2 and 3.

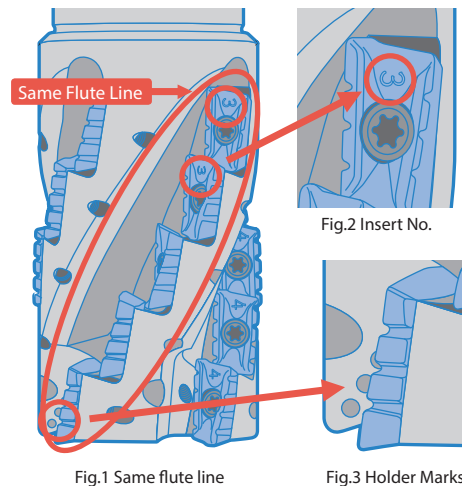


Fig.1 Same flute line

Fig.3 Holder Marks

## MECH Recommended Cutting Conditions ★: 1st Recommendation ☆: 2nd Recommendation

### Recommended Cutting Conditions (When using a notched insert)

Workpiece Material	fz(mm/t)	Recommended Insert Grades (Cutting Speed Vc m/min)				
		MEGACOAT NANO	MEGACOAT			PVD Coated Carbide
		PR1535	PR1225	PR1230	PR1210	PR830
Carbon Steel	0.08 – 0.1 – 0.15	☆ 120 – 180 – 250	☆ 120 – 180 – 250	★ 120 – 180 – 220	—	☆ 100 – 140 – 180
Alloy Steel	0.08 – 0.1 – 0.15	☆ 100 – 160 – 220	☆ 100 – 160 – 220	★ 100 – 160 – 200	—	☆ 100 – 140 – 180
Mold Steel	0.08 – 0.1 – 0.15	☆ 80 – 140 – 180	☆ 80 – 140 – 180	★ 80 – 140 – 160	—	☆ 100 – 120 – 150
Gray Cast Iron	0.08 – 0.15 – 0.18	—	—	—	★ 120 – 180 – 250	—
Nodular Cast Iron	0.08 – 0.15 – 0.18	—	—	—	★ 100 – 150 – 220	—
* Titanium Alloys	0.08 – 0.1 – 0.15	★ 40 – 60 – 80	—	—	☆ 30 – 50 – 70	—

\* Cutting with coolant is recommended for titanium alloy.

1. The recommended cutting conditions above are for notched inserts.
2. If using an insert without notch, the cutting depth (ap) and width (ae) should be less than 60% of those of a notched insert.


### JA Chipbreaker

Workpiece Material	fz(mm/t)	Recommended Insert Grades (Cutting Speed Vc m/min)	
		DLC Coated Carbide	Carbide
		PDL025	GW25
Aluminum Alloy (Si 13% or less)	0.05 – 0.3	200 – 1,000	200 – 800
Aluminum Alloy (Si 13% or less)	0.05 – 0.2	200 – 300	200 – 300

When using inserts with corner-R( $r\epsilon$ ) 1.6 or larger, additional modifications of the cutter body will be necessary. Ref. to the table below for the recommended modifications. (Additional grind off is not necessary when corner-R is 1.2mm or less.)

Insert Corner-R( $r\epsilon$ )	Additional Processing Dimension to Body Corner (mm)
1.6	R1.0
2.0	
2.4	R1.2
3.1	R1.6
4.0	R2.5

\* Round-shaped additional processing is recommended. When applying chamfer shaped additional processing, do not cut away too much.

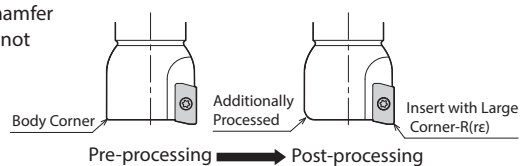


# Cutting Performance (Used Machine: Machining center equivalent to AC15 / 18.5kW)

## MECH Endmill Type

Cutting Dia.	Description	Overhang Length A (mm)
ø25	MECH025-S25-11-4-2T	48
ø32	MECH032-S32-11-5-2T	57
	MECH032-S32-11-5-4T	
ø40	MECH040-S32-11-6-4T	65
	MECH040-S42-11-6-4T	
ø50	MECH050-S42-11-7-4T	76
	MECH050-S42-11-7-6T	
ø40	MECH040-S32-17-4-2T	74
	MECH040-S42-17-4-2T	
ø50	MECH050-S42-17-5-4T	89

Shape

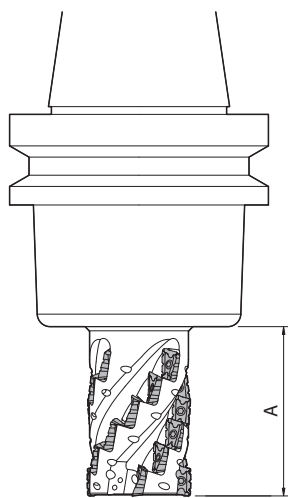

## 2 Flute Type

(Workpiece Material : S50C)

Description	Shouldering	Slotting
	<p>Cutting Speed : <math>V_c = 100 - 180</math> m/min Feed : <math>f_z = 0.08 - 0.15</math> mm/t</p>	<p>Cutting Speed : <math>V_c = 100 - 120</math> m/min Feed : <math>f_z = 0.08 - 0.12</math> mm/t</p>
MECH025-S25-11-4-2T		
MECH032-S32-11-5-2T		
MECH040-S32-17-4-2T MECH040-S42-17-4-2T		

## 4 Flute / 6 Flute Type

MECH032-S32-11-5-4T	
MECH040-S32-11-6-4T MECH040-S42-11-6-4T	
MECH050-S42-11-7-4T	
MECH050-S42-11-7-6T	
MECH050-S42-17-5-4T	

4 Flute / 6 Flute Type are not recommended for Slotting.





# Cutting Performance (Used Machine: Machining center equivalent to AC15 / 18.5kW)

## MECH Shell Mill Type

(Workpiece Material : S50C)

Cutting Dia.	Description	Overhang Length A (mm)
ø40	MECH040R-11-4-4T-M	125
	MECH050R-11-5-6T-M	123
	MECH050R-17-2-4T-M	112
ø50	MECH050R-17-4-4T-M	138
	MECH063R-17-3-4T-M	115
ø63	MECH063R-17-3-4T	115
	MECH080R-17-4-6T-M	130
ø80	MECH080R-17-4-6T	130
	MECH100R-17-4-6T-M	130
ø100	MECH100R-17-4-6T-M	130
	MECH100R-17-4-6T	130

Shape

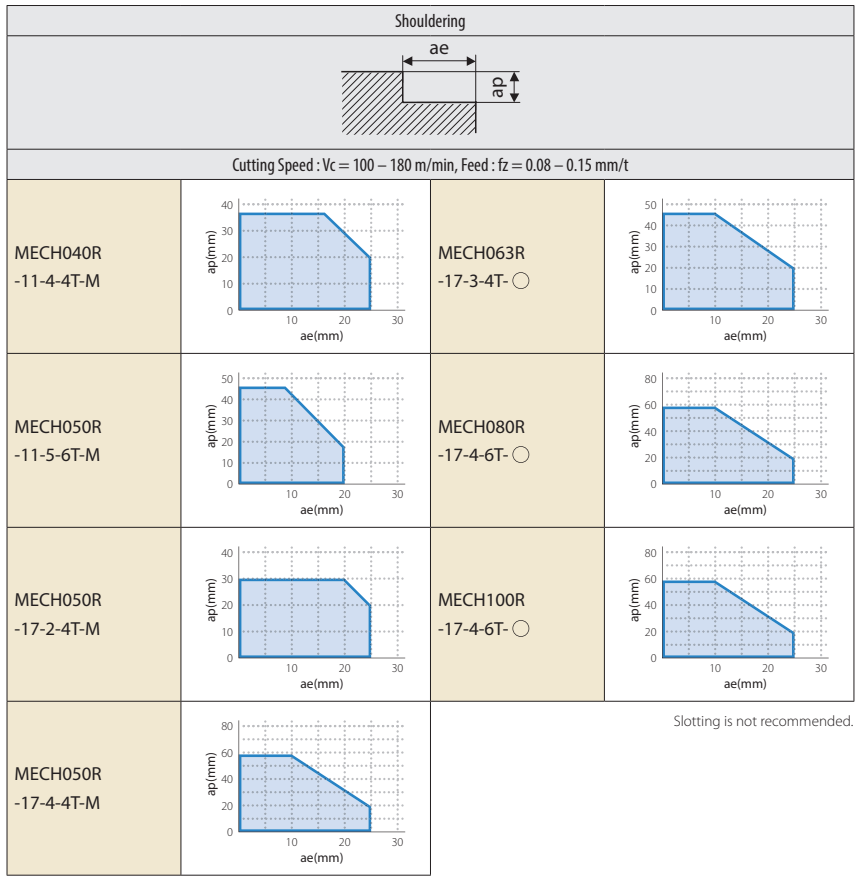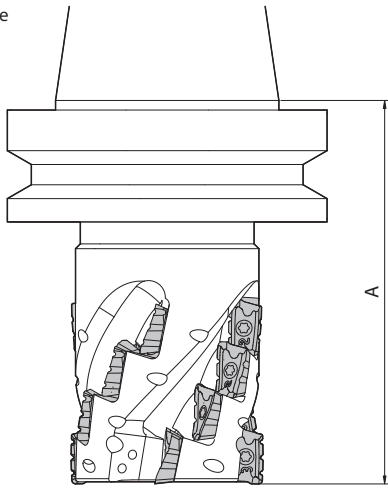

## MECH-BT50 (Integral Arbor type)

### MECH-BT50SA

(Replaceable Head type / Integral Arbor type)

(Workpiece Material : S50C)

Cutting Dia.	Description	Overhang Length L (mm)
ø50	MECH050R11-8-4T-BT50	143
	MECH050R11-4T-BT50SA	
	MECH050R17-7-4T-BT50	
ø63	MECH063R17-7-4T-BT50	173
	MECH063R17-4T-BT50SA	
ø80	MECH080R17-7-4T-BT50	173
	MECH080R17-4T-BT50SA	
ø100	MECH100R17-7-6T-BT50	173
	MECH100R17-6T-BT50SA	

Shape

